

講義側邊

Electrodynamics (I)

Tsun-Hsu Chang (張存續)

Fall 2025

Electrodynamics (I)” (PHYS 531000)


清大物理系 “電動力學(一)”

任課老師: 張存續 教授 (Prof. Tsun-Hsu Chang)

Fall Semester, 2025

Tel. 42978, E-mail: thschang@phys.nthu.edu.tw

**Office hours: Tuesdays 1:00-3:00 pm and Thursdays 4:00-5:00 pm
@Physics Building Rm. 417**

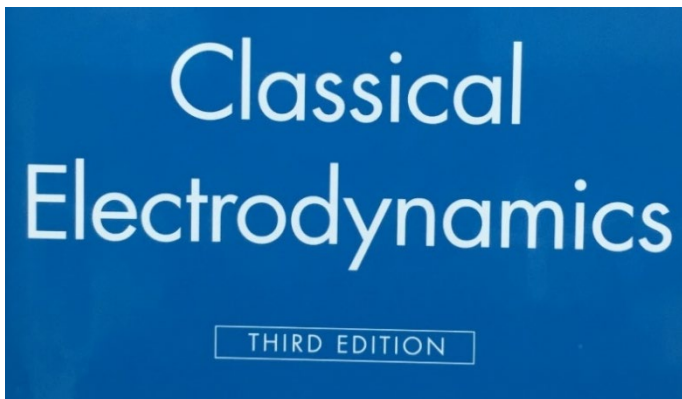


TA助教:

劉禹賢 xjp73204@gmail.com

曾柏瑋 tsengbowei@gapp.nthu.edu.tw

莊鎮銓 b06209036@gmail.com

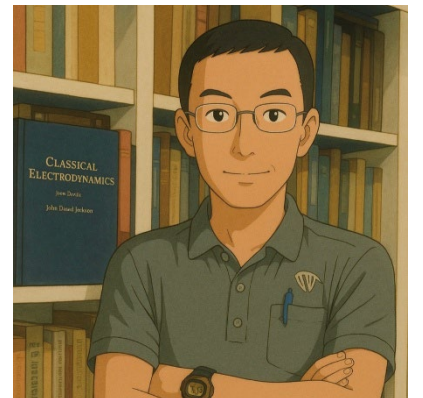

1. Description: We have studied electromagnetism in two courses before: General Physics II (freshman) and Electromagnetism (sophomore). What is new in this course? Electrodynamics will deal with the “same” Maxwell equations but from a more in-depth perspective. We are going to introduce a powerful tool, the Green function, to solve the electrostatic, magnetostatic, and even electromagnetic problems. To do that, we unavoidably have to learn the mathematics in spherical and cylindrical coordinates.

2. Textbook and References:

J. D. Jackson, “Classical Electrodynamics”, 3rd edition.

– D. J. Griffiths, Introduction to Electrodynamics, 4th edition.

– R. P. Feynman, R. B. Leighton, and M. Sands, The Feynman Lectures on Physics.

3. Time: Tuesdays (10:10-12:00) & Thursdays (10:10-12:00)

150 min will be used for lecturing. Others may be used for Q&A, quiz, etc.

4. Classroom: Physics Building R124 (69級講堂)

5. Homework: Doing homework is the best way to master the concepts of Electrodynamics. Some of the homework problems might be appeared in the exam.

6. Conduct of Class : Lecture notes will be projected sequentially on the screen during the class. Physical concepts will be emphasized, while algebraic details in the lecture notes will often be skipped. *Questions are encouraged.* It is assumed that students have at least gone through the algebra in the lecture notes before attending classes (*important!*).

7. Grading Policy:

Midterm (~40%); Final (~40%); Quiz (~20%). Class participation will be graded (~5%). The overall score will be normalized to reflect an average consistency with other courses.

8. Lecture Notes:

Starting from basic equations, the lecture notes follow Jackson closely with algebraic details filled in.

Equations numbered in the format of (1.1), (1.2)... refer to Jackson. Supplementary equations derived in lecture notes, which will later be referenced, are numbered (1), (2)... [restarting from (1) in each chapter.] Equations in Appendices A, B...of each chapter are numbered (A.1), (A.2)...and (B.1), (B.2)...

Page numbers cited in the text (e.g., p. 120) refer to Jackson.

Section numbers (e.g., Sec. 1.1) refer to Jackson. Main topics within each section are highlighted by **boldfaced** characters. Some words are typed in *italicized* characters for attention. Technical terms which are introduced for the first time are underlined.

9. Others:

- Electrodynamics is one of the most important courses for graduate students. After class, you had better spend at least 12 hours per week on this course.
- Those who have good grades can be waived from the Ph.D. qualifying examination. Good grades mean that the score is A– or better, and the overall ranking is in the top 30%.

Week	Date	Content
一	09/02 (二)	Introduction, evaluation etc. & Chap.1 Introduction to Electrostatics
	09/04 (四)	Chap.1 Probs. 3, 4, 5
二	09/09 (二)	Probs. 6, 8, 9
	09/11 (四)	Probs. 14, 16, 17
三	09/16 (二)	Chap.2 Boundary-Value Problems in Electrostatics I
	09/18 (四)	Probs. 1, 2, 3
四	09/23 (二)	Probs. 4, 5, 9
	09/25 (四)	Chap.3 Boundary-Value Problems in Electrostatics II Probs. 23, 26
五	09/30 (二)	Probs. 1, 2, 3
	10/02 (四)	Probs. 6, 7, 9
六	10/07 (二)	Probs. 16, 20, 22
	10/09 (四)	Chap.3 and Quiz #1 Chaps. 1-3
七	10/14 (二)	Chap.4 Multiples, Electrostatics of Macroscopic Media, Dielectrics
	10/16 (四)	Probs. 1, 2
八	10/21 (二)	Probs. 7, 8
	10/23 (四)	Probs. 10, 12
九	10/28 (二)	Midterm Chs. 1 – 4
	10/30 (四)	Chap.5 Magnetostatics, Faraday's Law, Quasi-Static Fields Probs. 1-3
+	11/04 (二)	Probs. 1, 3, 6
	11/06 (四)	Probs. 11, 15, 19
十一	11/11 (二)	Probs. 20, 22, 30
	11/13 (四)	Chap.6 Maxwell Equations, Macroscopic Electromagnetism, Conservation
十二	11/18 (二)	Probs. 8, 10
	11/20 (四)	Probs. 11, 12
十三	11/25 (二)	Probs. 15, 19
	11/27 (四)	Chap.6 and Quiz #2 Chaps. 5-6
十四	12/02 (二)	Chap.7 Plane Electromagnetic Waves and Wave Propagation
	12/04 (四)	Probs. 2, 3, 4
十五	12/09 (二)	Probs. 6, 13
	12/11 (四)	Probs. 14, 28
十六	12/16 (二)	Make up if necessary
	12/18 (四)	Final Chs. 5 – 7

Schedule

This table is for your reference only.


The practical schedule will depend on the students' learning condition.

Grading Class Participation (5%)

Participation is graded on a scale from 0 (lowest) through 5 (highest), using the criteria below. The criteria focus on what you demonstrate and do not presume to guess at what you know. This is because what you offer to the class is what you learn from. I expect the average level of participation to satisfy the criteria for a “2-3”.


Grade	Criteria
0	<input type="checkbox"/> Absent
1	<input type="checkbox"/> Present <input type="checkbox"/> Tries to respond when called on but does not offer much.
2	<input type="checkbox"/> Demonstrates very infrequent involvement in discussion. <input type="checkbox"/> Does not offer to contribute to discussion, but contributes to a moderate degree when called on. <input type="checkbox"/> Demonstrates sporadic involvement.
3	<input type="checkbox"/> Demonstrates adequate preparation: knows basic case or reading facts, but does not show evidence of trying to interpret or analyze them. <input type="checkbox"/> Offers straightforward information (e.g., straight from the case or reading), without elaboration or very infrequently (perhaps once a class).
4	<input type="checkbox"/> Demonstrates good preparation: knows case or reading facts well, has thought through implications of them. <input type="checkbox"/> Offers interpretations and analysis of case material (more than just facts) to class. <input type="checkbox"/> Contributes well to discussion in an ongoing way: responds to other students' points, thinks through own points, questions others in a constructive way, offers and supports suggestions that may be counter to the majority opinion. <input type="checkbox"/> Demonstrates consistent ongoing involvement.
5	<input type="checkbox"/> Demonstrates excellent preparation: has analyzed case exceptionally well, relating it to readings and other material (e.g., readings, course material, discussions, experiences, etc.). <input type="checkbox"/> Offers analysis, synthesis, and evaluation of case material, e.g., puts together pieces of the discussion to develop new approaches that take the class further. <input type="checkbox"/> Demonstrates ongoing very active involvement. <input type="checkbox"/> Contributes in a very significant way to ongoing discussion: keeps analysis focused, responds very thoughtfully to other students' comments, contributes to the cooperative argument-building, suggests alternative ways of approaching material and helps class analyze which approaches are appropriate, etc.

Practice makes perfect.

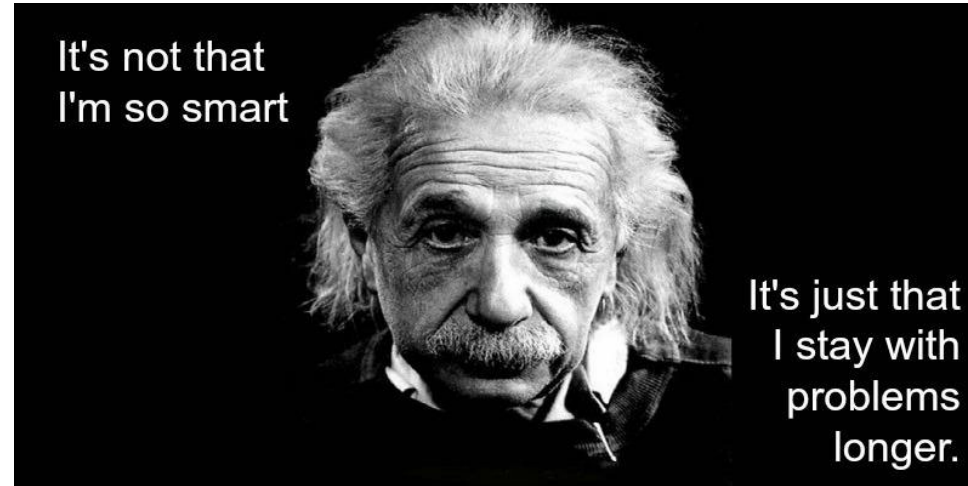

I took Electrodynamics three times.

1st

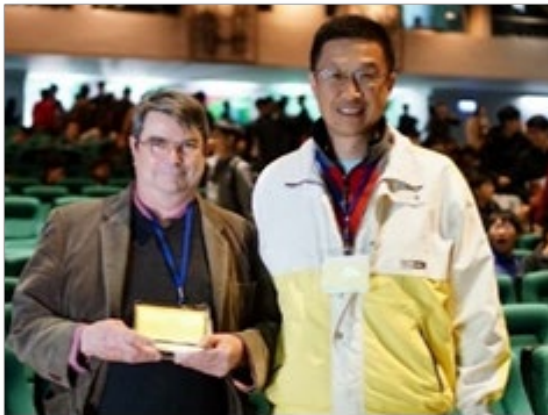

大四：Prof. James Nester
從數學的完美性來看物理
2015年台灣物理學會特殊貢獻獎

2nd



碩一：寇崇善教授
他從實用的角度出發
目前是日揚執行長、明遠董事長

3rd



博一：嚴愛德教授
條理分明、思路清晰、講義精美
獲得第三次清華傑出教學獎

國立清華大學Maxwell獎學金設置辦法

111年11月14日獎學金委員會初訂

112年3月29日系務會議通過

- 一 緣起：為表彰本系退休教授朱國瑞院士多年來對應用電磁教學與人才培育的卓越貢獻，特設置此獎學金。獎勵修讀物理系所開之「**電動力學一/二**」及「**電磁學一/二**」成績優良學生，以獎助優秀，激勵後進。
- 二 基金：本獎學金由朱國瑞教授之學生捐贈，以永續基金之形式定存孳生利息，以息款及本金支付獎學金，用完為止。
- 三 名額：**每學期每門課各三名。**
- 四 金額：**每名三千元。**
- 五 申請與審核：本獎學金每年開學後，由物理系主任及該科授課老師主動遴選上、下學期成績優良學生，再由系獎學金委員會議決。並於每年10月10日撥款。
- 六 附註：本獎學金無排他性，可兼領。
- 七 本辦法經系務會議通過後實施。

Chapter 1: Introduction to Electrostatics


1.8 Green's Theorem

Green's theorem, a powerful tool for treating electrostatic boundary-value problems, is a simple application of the divergence theorem:

$$\int_V \nabla \cdot \mathbf{A} d^3x = \oint_S \mathbf{A} \cdot \mathbf{n} da \quad \phi: \text{phi} \quad \psi: \text{psi} \quad \theta: \text{theta}$$

Let $\mathbf{A} = \phi \nabla \psi$, where ϕ and ψ are arbitrary functions of position.

$$\Rightarrow \begin{cases} \nabla \cdot \mathbf{A} = \nabla \cdot (\phi \nabla \psi) = \phi \nabla^2 \psi + \nabla \phi \cdot \nabla \psi \\ \mathbf{A} \cdot \mathbf{n} = \phi \nabla \psi \cdot \mathbf{n} = \phi \frac{\partial \psi}{\partial n} \end{cases}$$



Substituting these 2 expressions for $\nabla \cdot \mathbf{A}$ and $\mathbf{A} \cdot \mathbf{n}$ into the divergence theorem, we obtain Green's first identity,

$$\int_V (\phi \nabla^2 \psi + \nabla \phi \cdot \nabla \psi) d^3x = \oint_S \phi \frac{\partial \psi}{\partial n} da \quad (1.34)$$

Interchanging ϕ and ψ in (1.34), it reads,

$$\Rightarrow \int_V (\psi \nabla^2 \phi + \nabla \psi \cdot \nabla \phi) d^3x = \oint_S \psi \frac{\partial \phi}{\partial n} da$$

Subtracting these two equations, we obtain Green's second identity,

$$\int_V (\phi \nabla^2 \psi - \psi \nabla^2 \phi) d^3x = \oint_S (\phi \frac{\partial \psi}{\partial n} - \psi \frac{\partial \phi}{\partial n}) da \quad (1.35)$$

1.8 Green's Theorem (continued)

Green's theorem relates a volume integral to a surface integral and the volume integral contains the operator ∇^2 . These features are useful for the manipulation of the Poisson equation in bounded space.

For example, applying Green's second identity:

$$\int_V (\phi \nabla^2 \psi - \psi \nabla^2 \phi) d^3 x = \oint_S \left(\phi \frac{\partial \psi}{\partial n} - \psi \frac{\partial \phi}{\partial n} \right) da \quad (1.35)$$

we may convert the Poisson equation into an integral equation. How? See (1.31) or Page 18.

In (1.35), letting ψ be $\frac{1}{|\mathbf{x}-\mathbf{x}'|}$, $(\nabla^2 \frac{1}{|\mathbf{x}-\mathbf{x}'|} = -4\pi\delta(\mathbf{x}-\mathbf{x}'))$, ϕ be the electrostatic potential Φ (thus, $\nabla^2 \Phi = -\frac{\rho}{\epsilon_0}$), and \mathbf{x}' be the integration variable, we obtain

$$\int_V \left[-4\pi\Phi \delta(\mathbf{x}-\mathbf{x}') + \frac{1}{\epsilon_0 |\mathbf{x}-\mathbf{x}'|} \rho(\mathbf{x}') \right] d^3 x' = \oint_S \left[\Phi \frac{\partial}{\partial n'} \left(\frac{1}{|\mathbf{x}-\mathbf{x}'|} \right) - \frac{1}{|\mathbf{x}-\mathbf{x}'|} \frac{\partial \Phi}{\partial n'} \right] da'$$

\mathbf{x} inside V


$$\Rightarrow \Phi(\mathbf{x}) = \frac{1}{4\pi\epsilon_0} \int_V \frac{\rho(\mathbf{x}')}{|\mathbf{x}-\mathbf{x}'|} d^3 x' + \frac{1}{4\pi} \oint_S \left[\frac{1}{|\mathbf{x}-\mathbf{x}'|} \frac{\partial \Phi}{\partial n'} - \Phi \frac{\partial}{\partial n'} \left(\frac{1}{|\mathbf{x}-\mathbf{x}'|} \right) \right] da' \quad (1.36)$$

(1.36) is an integral equation (not a solution) for Φ . In infinite space, we have $\Phi \propto \frac{1}{R}$. Hence, (1.36) reduces to $\Phi(\mathbf{x}) = \frac{1}{4\pi\epsilon_0} \int_V \frac{\rho(\mathbf{x}')}{|\mathbf{x}-\mathbf{x}'|} d^3 x'$.

Delta Functions

Definition of the delta function:

$$\begin{cases} \delta(x - a) = 0, & \text{if } x \neq a \\ \int_{a_1}^{a_2} \delta(x - a) dx = 1, & \text{if } a_1 < a < a_2 \end{cases}$$

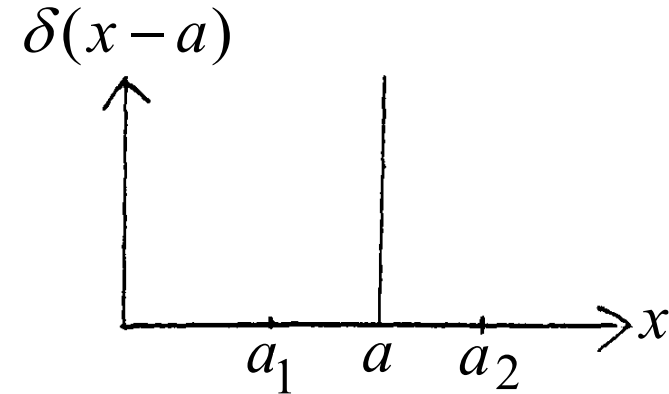

Note: Since the delta function is defined in terms of an integral, it takes an integration to bring out its full meaning.

Properties of delta function:

$$(i) \int_{a_1}^{a_2} f(x) \delta(x - a) dx = f(a) \quad (2)$$



$$(ii) \int_{a_1}^{a_2} f(x) \delta'(x - a) dx = \overbrace{f(x) \delta(x - a)}^0 \Big|_{a_1}^{a_2} - \int_{a_1}^{a_2} f'(x) \delta(x - a) dx \\ = -f'(a) \quad (3)$$

Delta Functions (continued)

(iii) Let $x = a$ be the root of $f(x) = 0$, then

$$\int_{a_1}^{a_2} \delta[f(x)] dx = \int_{f(a_1)}^{f(a_2)} \delta[f(x)] \frac{1}{\frac{d}{dx} f(x)} df(x)$$

$$= \begin{cases} \int_{f(a_1)}^{f(a_2)} \frac{1}{f'} \delta(f) df = \frac{1}{f'(a)} = \frac{1}{|f'(a)|}, & f'(a) > 0 \\ -\int_{f(a_2)}^{f(a_1)} \frac{1}{f'} \delta(f) df = -\frac{1}{f'(a)} = \frac{1}{|f'(a)|}, & f'(a) < 0 \end{cases}$$

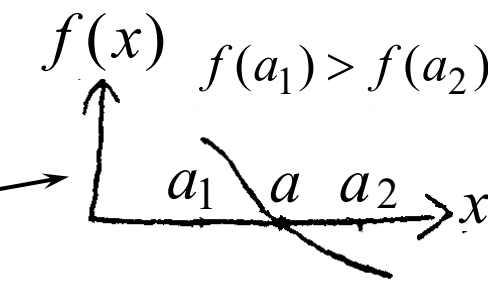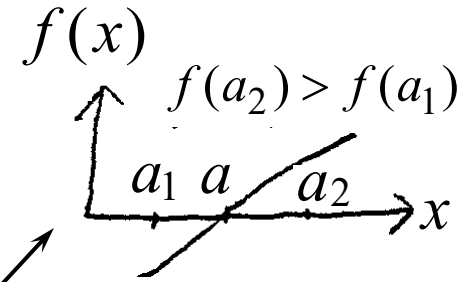

Note: In both expressions above, **the integration is from a smaller value to a larger value**, as in the definition of the delta function.

Compare with (2) $\Rightarrow \delta[f(x)] = \frac{1}{|f'(a)|} \delta(x - a)$ [$= \frac{1}{|f'(x)|} \delta(x - a)$] (4)

If $f(x)$ has multiple roots x_i [$f(x_i) = 0, i = 1, 2, \dots$], then

$$\delta[f(x)] = \sum_i \frac{1}{|f'(x_i)|} \delta(x - x_i) \quad [= \sum_i \frac{1}{|f'(x)|} \delta(x - x_i)] \quad (5)$$

Exercise: Show $\delta(a - x) = \delta(x - a)$ and $\delta(cx) = \delta(x)/|c|$

Extension to 3 dimensions :

1. Cartesian coordinates: $\mathbf{x} = (x_1, x_2, x_3)$


$$\delta(\mathbf{x} - \mathbf{x}') \equiv \delta(x_1 - x'_1)\delta(x_2 - x'_2)\delta(x_3 - x'_3) \quad (6)$$

$$\begin{aligned} \Rightarrow \int_V \delta(\mathbf{x} - \mathbf{x}') d^3x &= \int \delta(x_1 - x'_1) dx_1 \int \delta(x_2 - x'_2) dx_2 \int \delta(x_3 - x'_3) dx_3 \\ &= \begin{cases} 0, & \text{if } \mathbf{x}' \text{ lies outside } V \\ 1, & \text{if } \mathbf{x}' \text{ lies inside } V \end{cases} \end{aligned}$$

2. Cylindrical coordinates: $\mathbf{x} = (\rho, \varphi, z)$

$$\delta(\mathbf{x} - \mathbf{x}') \equiv \frac{1}{\rho} \delta(\rho - \rho')\delta(\varphi - \varphi')\delta(z - z') \quad (7)$$


$$\begin{aligned} \Rightarrow \int_V \delta(\mathbf{x} - \mathbf{x}') d^3x &= \int_V \delta(\mathbf{x} - \mathbf{x}') \rho d\rho d\varphi dz \\ &= \int \delta(\rho - \rho') d\rho \int \delta(\varphi - \varphi') d\varphi \int \delta(z - z') dz \\ &= \begin{cases} 0, & \text{if } \mathbf{x}' \text{ lies outside } V \\ 1, & \text{if } \mathbf{x}' \text{ lies inside } V \end{cases} \end{aligned}$$

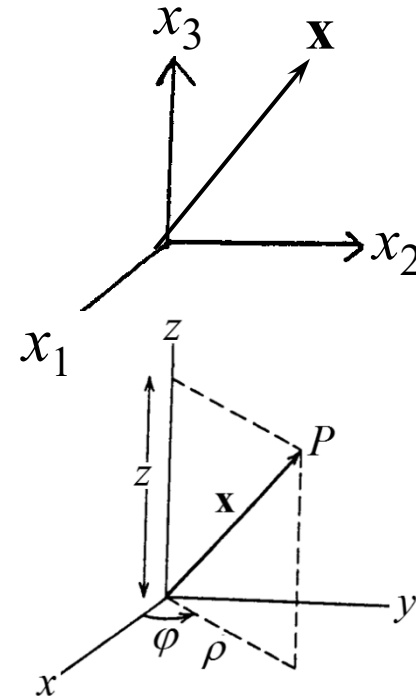

Question: If x and \mathbf{x} both have the dimension of cm, what are the dimensions of $\delta(x)$ and $\delta(\mathbf{x})$? [See Appendix (A), Eq. (A.9).]

Delta Functions *(continued)*

3. Spherical coordinates: $\mathbf{r} = (r, \theta, \varphi)$
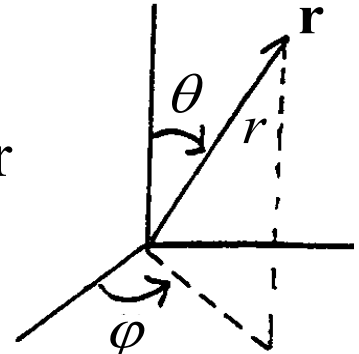
$$\delta(\mathbf{r} - \mathbf{r}') \equiv \begin{cases} \frac{1}{r^2 \sin \theta} \delta(r - r') \delta(\theta - \theta') \delta(\varphi - \varphi'), & \text{or} \\ \frac{1}{r^2} \delta(r - r') \delta(\cos \theta - \cos \theta') \delta(\varphi - \varphi') \end{cases} \quad (8)$$


By (4), $\delta(\cos \theta - \cos \theta') = \frac{1}{|\sin \theta|} \delta(\theta - \theta') = \frac{1}{\sin \theta} \delta(\theta - \theta')$, $0 \leq \theta \leq \pi$

$$\int_V \delta(\mathbf{r} - \mathbf{r}') d^3x = \int_V \frac{\delta(r - r')}{r^2} \delta(\cos \theta - \cos \theta') \delta(\varphi - \varphi') \underbrace{r^2 dr d(\cos \theta) d\varphi}_{d^3x \text{ [see (9) below]}}$$

$$= \begin{cases} 0, & \text{if } \mathbf{r}' \text{ lies outside } V \\ 1, & \text{if } \mathbf{r}' \text{ lies inside } V \end{cases}$$

Note: Volume integration in spherical coordinates

$$\int_0^\infty dr \int_0^\pi r d\theta \int_0^{2\pi} r \sin \theta d\varphi = \int_0^\infty r^2 dr \underbrace{\int_0^\pi \sin \theta d\theta}_{-\int_1^{-1} d(\cos \theta)} \int_0^{2\pi} d\varphi$$

$$= \int_0^\infty r^2 dr \int_{-1}^1 d(\cos \theta) \int_0^{2\pi} d\varphi$$

$$\Rightarrow d^3x = r^2 \sin \theta dr d\theta d\varphi \text{ or } r^2 dr d(\cos \theta) d\varphi \quad (9)$$

Variables are to be integrated from smaller to larger values.

Delta Functions (*continued*)

Approximate representations of the delta function :

The delta function, $\delta(x)$, can be represented analytically by the following functions because they satisfy the definition of the delta function in the limit $\gamma \rightarrow 0$ ($\gamma > 0$).

$$\delta(x) = \lim_{\gamma \rightarrow 0} \frac{1}{\pi} \frac{\gamma}{x^2 + \gamma^2}$$

$$\delta(x) = \lim_{\gamma \rightarrow 0} \frac{1}{\sqrt{2\pi\gamma}} e^{-\frac{x^2}{2\gamma^2}}$$

$$\delta(x) = \lim_{\gamma \rightarrow 0} \begin{cases} \frac{1}{\gamma}, & \text{for } -\frac{\gamma}{2} < x < \frac{\gamma}{2} \\ 0, & \text{otherwise} \end{cases}$$

Delta Functions (continued)

Example 1: A total charge Q is uniformly distributed around a circular ring of radius a and infinitesimal thickness. Write the charge density $\rho(\mathbf{x})$ in cylindrical coordinates.

Solution:


Is there any φ -dependence?

Let $\rho(\mathbf{x}) = K\delta(r - a)\delta(z)$ and find K as follows.

$$\begin{aligned}\int \rho(\mathbf{x}) d^3x &= K \int \delta(r - a)\delta(z) r dr d\varphi dz \\ &= 2\pi K a = Q\end{aligned}$$

$$\Rightarrow K = \frac{Q}{2\pi a}$$

$$\Rightarrow \rho(\mathbf{x}) = \frac{Q}{2\pi a} \delta(r - a)\delta(z)$$

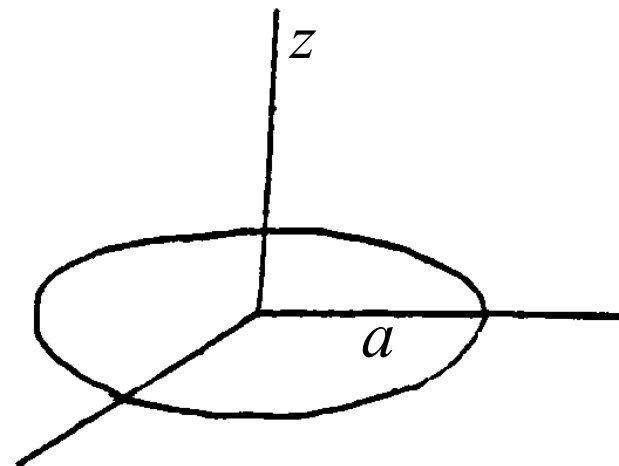


Note: ρ has the dimension of "charge/volume" as expected.

Delta Functions (continued)

Example 2: Prove $\nabla^2 \frac{1}{r} = -4\pi\delta(\mathbf{r})$ ($\nabla^2 \frac{1}{|\mathbf{x}-\mathbf{x}'|}$?)

Solution: Definition of $\delta(\mathbf{r})$: $\begin{cases} \delta(\mathbf{r}) = 0, & \text{if } r \neq 0 \\ \int \delta(\mathbf{r}) d^3x = 1 \end{cases}$

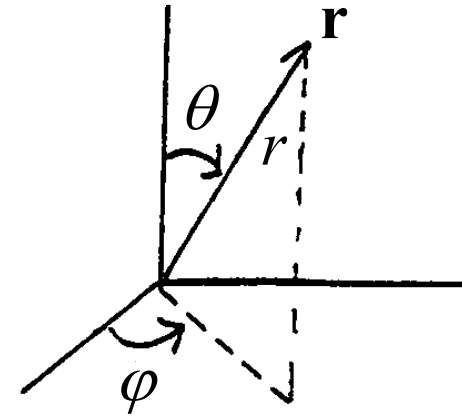

Hence, we need to prove

(i) $\nabla^2 \frac{1}{r} = 0$, if $r \neq 0$

(ii) $\int \nabla^2 \frac{1}{r} d^3x = -4\pi \int \delta(\mathbf{r}) d^3x = -4\pi$

It is convenient to use the spherical coordinates. To prove (i), we write ∇^2 as (see back cover of Jackson)

$$\nabla^2 = \frac{1}{r^2} \frac{\partial}{\partial r} \left(r^2 \frac{\partial}{\partial r} \right) + \frac{1}{r^2 \sin \theta} \frac{\partial}{\partial \theta} \left(\sin \theta \frac{\partial}{\partial \theta} \right) + \frac{1}{r^2 \sin^2 \theta} \frac{\partial^2}{\partial \phi^2}$$

$$\Rightarrow \nabla^2 \frac{1}{r} = \frac{1}{r^2} \frac{d}{dr} \left(r^2 \frac{d}{dr} \frac{1}{r} \right) = -\frac{1}{r^2} \frac{d}{dr} \left(\frac{r^2}{r^2} \right) = 0 \quad \text{if } r \neq 0$$

Note: $\frac{r^2}{r^2}$ is undetermined at $r = 0$. However, here we are only concerned with the region $r > 0$.


Delta Functions (continued)

To prove (ii), we integrate $\nabla^2 \frac{1}{r}$ over a spherical volume V

$$\int_V \nabla^2 \frac{1}{r} d^3x = \int_V \nabla \cdot \nabla \frac{1}{r} d^3x \stackrel{\text{divergence thm.}}{=} \oint_S \mathbf{e}_r \cdot \underbrace{\nabla \frac{1}{r}}_{-\frac{1}{r^2} \mathbf{e}_r} \underbrace{d\mathbf{a}}_{r^2 d\Omega} = -\oint_S r^2 \frac{1}{r^2} d\Omega = -4\pi$$

Note: Since $r > 0$ on the spherical surface, again we do not have the problem of evaluating r^2 / r^2 at $r = 0$.

Change to a coordinate system in which $\mathbf{r} = \mathbf{x} - \mathbf{x}'$ and $r = |\mathbf{x} - \mathbf{x}'|$. We obtain from $\nabla^2 \frac{1}{r} = -4\pi\delta(\mathbf{r})$



$$\nabla^2 \frac{1}{|\mathbf{x} - \mathbf{x}'|} = -4\pi\delta(\mathbf{x} - \mathbf{x}') \tag{1.31}$$

optional Example 3: Derive $\nabla^2 \Phi(\mathbf{x}) = -\frac{\rho(\mathbf{x})}{\epsilon_0}$ from $\Phi(\mathbf{x}) = \frac{1}{4\pi\epsilon_0} \int \frac{\rho(\mathbf{x}')}{|\mathbf{x} - \mathbf{x}'|} d^3x'$

$$\begin{aligned} \text{Solution: } \nabla^2 \Phi(\mathbf{x}) &= \frac{1}{4\pi\epsilon_0} \int \rho(\mathbf{x}') \nabla^2 \frac{1}{|\mathbf{x} - \mathbf{x}'|} d^3x' \\ &= \frac{1}{4\pi\epsilon_0} \int \rho(\mathbf{x}') [-4\pi\delta(\mathbf{x} - \mathbf{x}')] d^3x' = -\frac{\rho(\mathbf{x})}{\epsilon_0} \end{aligned}$$

1.9 Uniqueness of Solution with Dirichlet or Neumann Boundary Conditions

$$\left\{ \begin{array}{l} \text{Dirichlet boundary condition: } \Phi_s \text{ specified} \\ \text{Neumann boundary condition: } \frac{\partial}{\partial n} \Phi_s \text{ specified} \end{array} \right.$$


As another application of Green's theorem, we use it to prove the uniqueness theorem for the solution of the Poisson equation.

Take Dirichlet boundary condition as an example.

Let there be two solutions, Φ_1 and Φ_2 , which both satisfy

$$\nabla^2 \Phi = -\rho/\epsilon_0 \text{ with } \Phi = \Phi_s \text{ on } S \text{ (Dirichlet b.c.),}$$

$$\text{i.e. } \left\{ \begin{array}{l} \nabla^2 \Phi_1 = -\rho/\epsilon_0 \\ \nabla^2 \Phi_2 = -\rho/\epsilon_0 \end{array} \right. \text{ with } \left\{ \begin{array}{l} \Phi_1 = \Phi_s \\ \Phi_2 = \Phi_s \end{array} \right. \text{ on } S$$



Define $U \equiv \Phi_1 - \Phi_2$, then $\nabla^2 U = 0$ with $U = \Phi_s - \Phi_s = 0$ on S

1.9 Uniqueness of Solution... (continued)

Rewrite Green's 1st identity: $\int_V (\phi \nabla^2 \psi + \nabla \phi \cdot \nabla \psi) d^3x = \oint_S \phi \frac{\partial \psi}{\partial n} da$

Let $\phi = \psi = U$


b.c. $U = 0$ or $\partial U / \partial n = 0$ on S

$$\Rightarrow \int_V (U \underbrace{\nabla^2 U}_0 + \nabla U \cdot \nabla U) d^3x = \oint_S U \frac{\partial U}{\partial n} da \stackrel{\downarrow}{=} 0 \Rightarrow \int_V |\nabla U|^2 d^3x = 0$$

$\Rightarrow \nabla U = 0$ everywhere within V

$\Rightarrow U = \Phi_1 - \Phi_2 = 0$ since $U = 0$ on S

$= \text{const.},$ if $\partial U / \partial n = 0$ on S



$\Rightarrow \Phi_1$ and Φ_2 differ by at most a constant, hence are the same solution.

Note: Since the solution is uniquely determined by specifying either Φ or $\partial \Phi / \partial n$ on the boundary, the Cauchy boundary condition (Φ and $\partial \Phi / \partial n$ both specified on the boundary) is an over-specification, which may lead to inconsistency.


Exercise: Prove that there cannot be any static \mathbf{E} inside a closed, hollow conductor if there is no charge in the hollow region.

1.10 Formal Solution of Electrostatic Boundary-Value Problem with Green Function

Green Function $G_D(\mathbf{x}, \mathbf{x}')$:

In electrostatics, the Green function is the solution of the following problem:

$$G_D = 0 \text{ for } \mathbf{x} \text{ on } S \rightarrow$$

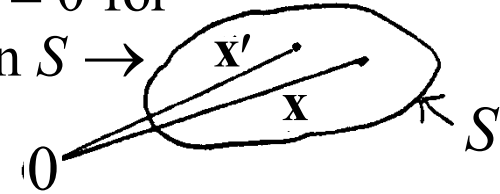


$$\nabla^2 G_D(\mathbf{x}, \mathbf{x}') = -4\pi\delta(\mathbf{x} - \mathbf{x}') \text{ with } G_D(\mathbf{x}, \mathbf{x}') = 0 \text{ for } \mathbf{x} \text{ on } S,$$

where \mathbf{x} is the variable of the differential equation and \mathbf{x}' is treated as a constant. $G_D(\mathbf{x}, \mathbf{x}')$ is the potential of a unit point source ($q \rightarrow 4\pi\epsilon_0$) located at \mathbf{x}' subject to the b. c. that $G_D(\mathbf{x}, \mathbf{x}')$ vanishes for \mathbf{x} on S .

Symmetry Property of $G_D(\mathbf{x}, \mathbf{x}')$:

$$G_D = 0 \text{ for } \mathbf{y} \text{ on } S \rightarrow$$

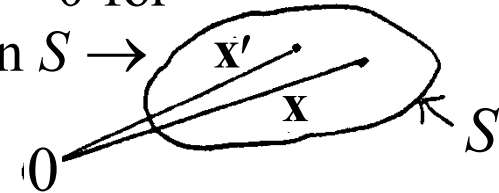

Consider two equations: one with a point source at \mathbf{x} , the other with a point source at \mathbf{x}' . The variable is \mathbf{y} .

$$\nabla_y^2 G_D(\mathbf{y}, \mathbf{x}) = -4\pi\delta(\mathbf{y} - \mathbf{x}), \quad \text{b.c. } G_D(\mathbf{y}, \mathbf{x}) = 0 \text{ for } \mathbf{y} \text{ on } S$$

$$\nabla_y^2 G_D(\mathbf{y}, \mathbf{x}') = -4\pi\delta(\mathbf{y} - \mathbf{x}'), \quad \text{b.c. } G_D(\mathbf{y}, \mathbf{x}') = 0 \text{ for } \mathbf{y} \text{ on } S$$

1.10 Formal Solution of Electrostatic Boundary-Value Problem...(continued)

$$\text{Rewrite: } \int_V \left(\phi \nabla_y^2 \psi - \psi \nabla_y^2 \phi \right) d^3 y = \oint_S \left[\phi \frac{\partial \psi}{\partial n} - \psi \frac{\partial \phi}{\partial n} \right] da \quad (1.35)$$

Let $\phi = G_D(\mathbf{y}, \mathbf{x})$ and $\psi = G_D(\mathbf{y}, \mathbf{x}')$, where \mathbf{y} is the variable.

$$\begin{aligned} &\Rightarrow \int_V \left[\overbrace{G_D(\mathbf{y}, \mathbf{x})}^{-4\pi\delta(\mathbf{y}-\mathbf{x}')} \nabla_y^2 \overbrace{G_D(\mathbf{y}, \mathbf{x}')}^{-4\pi\delta(\mathbf{y}-\mathbf{x})} - \overbrace{G_D(\mathbf{y}, \mathbf{x}')}^{-4\pi\delta(\mathbf{y}-\mathbf{x})} \nabla_y^2 \overbrace{G_D(\mathbf{y}, \mathbf{x})}^{-4\pi\delta(\mathbf{y}-\mathbf{x}')} \right] d^3 y \\ &= \oint_S \left[\underbrace{G_D(\mathbf{y}, \mathbf{x})}_{=0 \text{ on } S} \frac{\partial}{\partial n} G_D(\mathbf{y}, \mathbf{x}') - \underbrace{G_D(\mathbf{y}, \mathbf{x}')}_{=0 \text{ on } S} \frac{\partial}{\partial n} G_D(\mathbf{y}, \mathbf{x}) \right] da \end{aligned}$$

$$\Rightarrow 4\pi [G_D(\mathbf{x}', \mathbf{x}) - G_D(\mathbf{x}, \mathbf{x}')] = 0$$

$$\Rightarrow G_D(\mathbf{x}', \mathbf{x}) = G_D(\mathbf{x}, \mathbf{x}') \quad [\text{symmetry property of } G_D(\mathbf{x}, \mathbf{x}')]]$$

Questions:

1. Does $\nabla^2 G_D(\mathbf{x}, \mathbf{x}') = -4\pi\delta(\mathbf{x} - \mathbf{x}')$ imply $\nabla'^2 G_D(\mathbf{x}, \mathbf{x}') = -4\pi\delta(\mathbf{x}' - \mathbf{x})$?
2. Give two examples to show the physical meaning of the symmetry property of $G_D(\mathbf{x}, \mathbf{x}')$.

Formal Solution of Electrostatic Boundary - Value Problem :

The expression $\Phi(\mathbf{x}) = \frac{1}{4\pi\epsilon_0} \int \frac{\rho(\mathbf{x}')}{|\mathbf{x}-\mathbf{x}'|} d^3x'$ is applicable only to unbounded space. By Green's theorem, we may generalize it to an expression for bounded space with prescribed boundary conditions.

Consider a general electrostatic boundary-value problem:

$$\nabla^2 \Phi(\mathbf{x}) = -\rho(\mathbf{x}) / \epsilon_0 \quad \text{with } \Phi(\mathbf{x}) = \Phi_s(\mathbf{x}) \text{ for } \mathbf{x} \text{ on } S \quad (10)$$

Green's 2nd identity:

$$\begin{aligned} & \int_V \left[\phi(\mathbf{x}') \nabla'^2 \psi(\mathbf{x}') - \psi(\mathbf{x}') \nabla'^2 \phi(\mathbf{x}') \right] d^3x' \\ &= \oint_S \left[\phi(\mathbf{x}') \frac{\partial}{\partial n'} \psi(\mathbf{x}') - \psi(\mathbf{x}') \frac{\partial}{\partial n'} \phi(\mathbf{x}') \right] da' \end{aligned} \quad (1.35)$$




In (1.35), let $\phi(\mathbf{x}')$ be the solution of (10) with variable \mathbf{x}' (i.e., $\Phi(\mathbf{x}')$). Let $\psi(\mathbf{x}') = G_D(\mathbf{x}, \mathbf{x}')$, where $G_D(\mathbf{x}, \mathbf{x}')$ is the Green function satisfying

$$\nabla'^2 G_D(\mathbf{x}, \mathbf{x}') = -4\pi\delta(\mathbf{x} - \mathbf{x}') \quad \text{with } G_D(\mathbf{x}, \mathbf{x}') = 0 \text{ for } \mathbf{x}' \text{ on } S \quad (11)$$

Substitution of $\phi(\mathbf{x}')$ and $\psi(\mathbf{x}')$ into (1.35) gives

1.10 Formal Solution of Electrostatic Boundary-Value Problem...(continued)

$$\int_V [\underbrace{\Phi(\mathbf{x}') \nabla'^2 G_D(\mathbf{x}, \mathbf{x}')}_{-4\pi\delta(\mathbf{x}-\mathbf{x}')} - \underbrace{G_D(\mathbf{x}, \mathbf{x}') \nabla'^2 \Phi(\mathbf{x}')}_{-\rho(\mathbf{x}')/\epsilon_0}] d^3 x'$$


$$= \oint_S [\Phi(\mathbf{x}') \frac{\partial}{\partial n'} G_D(\mathbf{x}, \mathbf{x}') - \underbrace{G_D(\mathbf{x}, \mathbf{x}') \frac{\partial}{\partial n'} \Phi(\mathbf{x}')}_{= 0 \text{ on } S}] da'$$


Thus, we obtain

$$\Phi(\mathbf{x}) = \frac{1}{4\pi\epsilon_0} \int_V \rho(\mathbf{x}') G_D(\mathbf{x}, \mathbf{x}') d^3 x' - \frac{1}{4\pi} \oint_S \Phi(\mathbf{x}') \frac{\partial G_D(\mathbf{x}, \mathbf{x}')}{\partial n'} da' \quad (1.44)$$

(1.44) expresses the solution Φ of the general electrostatic problem in (10) in terms of the solution $G_D(\mathbf{x}, \mathbf{x}')$ of the point source problem in (11) and the boundary value (Φ_s) of Φ on S . To evaluate (1.44), we first solve (11) for $G_D(\mathbf{x}, \mathbf{x}')$, then substitute $G_D(\mathbf{x}, \mathbf{x}')$, $\rho(\mathbf{x}')$, Φ_s into (1.44). It is often simpler to solve $G_D(\mathbf{x}, \mathbf{x}')$ from (11) than solving Φ directly from (10), because (11) has the simple b.c. of $G_D(\mathbf{x}, \mathbf{x}') = 0$ on S . Applications of (1.44) can be found in Chs. 2 and 3. The problem below gives an application without the need to solve (11) for $G(\mathbf{x}, \mathbf{x}')$.

Example: A hollow cube (see figure) has six square sides. There is no charge inside. Five sides are grounded. The sixth side, insulated from the others, is held at a constant potential Φ_0 . Find the potential at the center of the cube.

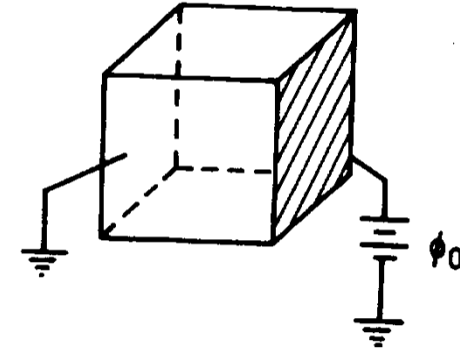

Solution: Let the center of the cube be at $\mathbf{x} = 0$ and rewrite (1.44):

$$\Phi(\mathbf{x}) = \frac{1}{4\pi\epsilon_0} \int_V \rho(\mathbf{x}') G_D(\mathbf{x}, \mathbf{x}') d^3x' - \frac{1}{4\pi} \oint_S \Phi(\mathbf{x}') \frac{\partial}{\partial n'} G_D(\mathbf{x}, \mathbf{x}') da' \quad (1.44)$$

If all 6 sides had the potential Φ_0 , then $\Phi(\mathbf{x} = 0) = \Phi_0$ and by (1.44)

$$\Phi_0 = -\frac{1}{4\pi} \oint_S \Phi_0 \frac{\partial}{\partial n'} G_D(0, \mathbf{x}') da' \quad (12)$$


For the present problem, we have $\Phi = \Phi_0$ on side 1 and $\Phi = 0$ on the other 5 sides. By (1.44), the potential at the center is

$$\begin{aligned} \Phi(\mathbf{x} = 0) &= -\frac{1}{4\pi} \int_{side\ 1} \Phi_0 \frac{\partial}{\partial n'} G_D(0, \mathbf{x}') da' = -\frac{1}{6} \underbrace{\frac{1}{4\pi} \oint_S \Phi_0 \frac{\partial}{\partial n'} G_D(0, \mathbf{x}') da'}_{-\Phi_0 \text{ by (12)}} \\ &= \frac{1}{6} \Phi_0 \end{aligned}$$

$\because G_D(0, \mathbf{x}')$ is symmetric with respect to all six sides.

1.1 Coulomb's Law

Coulomb's law, discovered experimentally, is a fundamental law governing all electrostatic phenomena. It states that the force on point charge q due to point charge q_1 obeys (see figure)
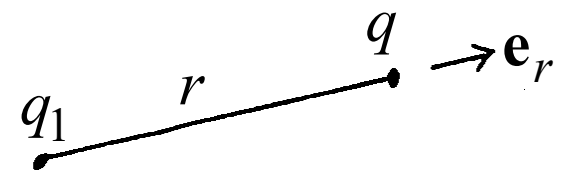
$$\mathbf{F} = \frac{qq_1}{4\pi\epsilon_0 r^2} \mathbf{e}_r \Rightarrow \left\{ \begin{array}{l} 1. F \propto q, q_1, \text{ and } \frac{1}{r^2}. \\ 2. F \text{ is along } r. \\ \quad \text{(central force)} \\ 3. \left\{ \begin{array}{l} F \text{ is attractive if } q \text{ and } q_1 \text{ have opposite signs.} \\ F \text{ is repulsive if } q \text{ and } q_1 \text{ have the same sign.} \end{array} \right. \end{array} \right.$$


Furthermore, if there are multiple charges present, the total force on q is the vector sum of the two-body Coulomb forces between q and each of its surrounding charges.

Question: What is the principle of linear superposition?

1.2 Electric Field

The electric field at point \mathbf{x} due to one or more charges is defined

as
$$\mathbf{E}(\mathbf{x}) \equiv \lim_{q \rightarrow 0} \frac{\mathbf{F}}{q}, \quad (1.1)$$


where q is a test charge and \mathbf{F} is the total Coulomb force on q . We let q be infinitesimal so that it will not alter the field configuration.

Thus, $\mathbf{E}(\mathbf{x})$ due to a single point charge q_1 is

$$\mathbf{E}(\mathbf{x}) = \frac{q_1}{4\pi\epsilon_0} \frac{1}{r^2} \mathbf{e}_r = \frac{q_1}{4\pi\epsilon_0} \frac{\mathbf{x} - \mathbf{x}_1}{|\mathbf{x} - \mathbf{x}_1|^3}$$


$$r\mathbf{e}_r = \mathbf{x} - \mathbf{x}_1 = (x - x_1)\mathbf{e}_x + (y - y_1)\mathbf{e}_y + (z - z_1)\mathbf{e}_z$$

$$r = |\mathbf{x} - \mathbf{x}_1| = \sqrt{(x - x_1)^2 + (y - y_1)^2 + (z - z_1)^2}$$

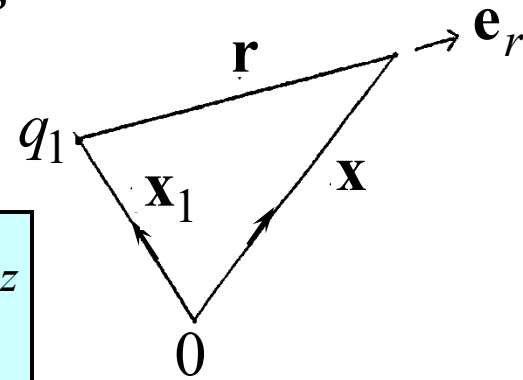

For distributed charges, we have by linear

superposition:
$$\mathbf{E}(\mathbf{x}) = \frac{1}{4\pi\epsilon_0} \int_V \frac{\rho(\mathbf{x}')(\mathbf{x} - \mathbf{x}')}{|\mathbf{x} - \mathbf{x}'|^3} d^3x' \quad (1.5)$$




Question: Why write " $r\mathbf{e}_r$ " as " $\mathbf{x} - \mathbf{x}_1$ "?

Self-learning

1.3 Gauss's Law

Consider a point charge q and a closed surface S and adopt the following notations:

- da : infinitesimal surface area on S
- \mathbf{n} : unit vector normal to da and pointing *outward*
- \mathbf{e}_r : unit vector along \mathbf{r}
- θ : The angle between \mathbf{n} and \mathbf{E}

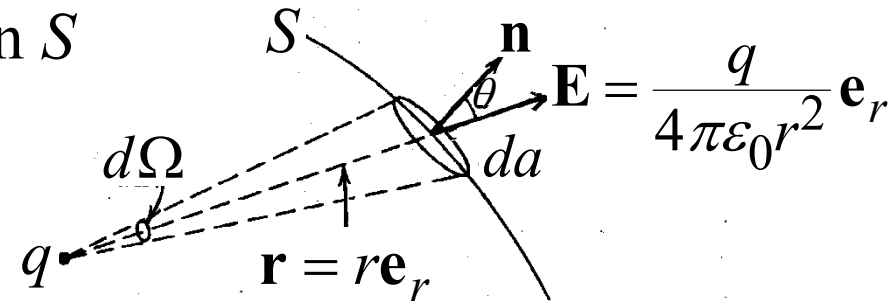

$$\mathbf{E} \cdot \mathbf{n} da = \frac{q}{4\pi\epsilon_0 r^2} \mathbf{e}_r \cdot \mathbf{n} da = \frac{q}{4\pi\epsilon_0 r^2} \underbrace{\cos \theta}_{r^2 d\Omega} da = \frac{q}{4\pi\epsilon_0} d\Omega$$

Note: $d\Omega$ carries the sign of $\cos \theta$.

$$\begin{cases} d\Omega > 0, & \text{if } \cos \theta > 0 \\ d\Omega < 0, & \text{if } \cos \theta < 0 \end{cases} \Rightarrow \begin{cases} q \text{ inside } S, \\ \int d\Omega = 4\pi \end{cases} \begin{cases} q \text{ outside } S, \\ \int d\Omega = 0 \end{cases}$$

The diagrams show two cases for the solid angle integral. In the first case, the charge q is inside the closed surface S , and the normal vectors \mathbf{n} point outwards from the surface. In the second case, the charge q is outside the closed surface S , and the normal vectors \mathbf{n} also point outwards from the surface.

$$\Rightarrow \oint_S \mathbf{E} \cdot \mathbf{n} da = \frac{q}{4\pi\epsilon_0} \int d\Omega = \begin{cases} \frac{q}{\epsilon_0}, & q \text{ inside } S \\ 0, & q \text{ outside } S \end{cases} \left[\begin{array}{l} \text{Gauss's law for} \\ \text{a single charge} \end{array} \right] \quad (1.9)$$

Self-learning

By the principle of linear superposition, Gauss's law for a discrete set of charges inside S is

$$\oint_S \mathbf{E} \cdot \mathbf{n} \, da = \frac{1}{\epsilon_0} \sum_i q_i \quad (1.10)$$

and Gauss's law for a distribution of charge is

$$\oint_S \mathbf{E} \cdot \mathbf{n} \, da = \frac{1}{\epsilon_0} \int_V \rho(\mathbf{x}) d^3 x \quad (1.11)$$

Discussion: (1.11) is the *integral* form of Gauss's law. In the next section, we will derive the *differential* form of Gauss's law. Gauss's law is a powerful mathematical representation of Coulomb's law (see example below). Furthermore, as will be shown in Ch. 6, the two forms of Gauss's law are also applicable to *time-dependent* cases where the original form of Coulomb's law (a *static* law),

$$\mathbf{E}(\mathbf{x}) = \frac{1}{4\pi\epsilon_0} \int_V \frac{\rho(\mathbf{x}')(\mathbf{x}-\mathbf{x}')}{|\mathbf{x}-\mathbf{x}'|^3} d^3 x',$$

no longer applies.

Self-learning

Shell theorems - an application of Gauss's law:

Halliday, Resnick, and Walker, "Fundamentals of Physics":

"The two shell theorems that we found so useful in our study of gravitation hold equally well in electrostatics:

Theorem 1: A uniform spherical shell of charge behaves, for external points, as if all its charge were concentrated at its center.

Theorem 2: A uniform spherical shell of charge exerts no force on a charge particle placed inside the shell."

Proof:

$$[\text{Symmetry consideration}] \Rightarrow \mathbf{E} = E_r \mathbf{e}_r$$

$$[\text{Gauss' law}] \Rightarrow 4\pi r^2 E_r = \begin{cases} \frac{Q}{\epsilon_0}, & r > a \\ 0, & r < a \end{cases}$$

a : radius of shell

Q : total charge on shell

$$\Rightarrow E_r = \begin{cases} \frac{Q}{4\pi\epsilon_0 r^2}, & r > a \quad (\text{as if } Q \text{ were at } r = 0) \\ 0, & r < a \quad (Q \text{ produces no } \mathbf{E}) \end{cases}$$


1.4 Differential Form of Gauss's Law

Using the divergence theorem:

$$\int_V \nabla \cdot \mathbf{A} d^3x = \oint_S \mathbf{A} \cdot \mathbf{n} da,$$

$\left[\begin{array}{l} \mathbf{n} \text{ is a unit vector normal to the} \\ \text{surface element } da \text{ and pointing} \\ \text{away from the volume } v \text{ enclosed} \\ \text{by surface } S. \end{array} \right]$

we obtain from $\oint_S \mathbf{E} \cdot \mathbf{n} da = \frac{1}{\epsilon_0} \int_V \rho(\mathbf{x}) d^3x$ [(1.11)]



$$\oint_S \mathbf{E} \cdot \mathbf{n} da = \int_V \nabla \cdot \mathbf{E} d^3x = \frac{1}{\epsilon_0} \int_V \rho(\mathbf{x}) d^3x$$

$$\Rightarrow \int_V (\nabla \cdot \mathbf{E} - \frac{\rho}{\epsilon_0}) d^3x = 0 \tag{1.12}$$

$$\Rightarrow \nabla \cdot \mathbf{E} = \frac{\rho}{\epsilon_0} \quad [\text{differential form of Gauss's law}] \tag{1.13}$$

Question: If $\int_V f(x) d^3x = 0$ for an arbitrary volume v , then $f(x) = 0$ everywhere. This is the basis for obtaining (1.13) from (1.12). Does $\oint_S \mathbf{A} \cdot d\mathbf{a} = 0$ for an arbitrary closed surface S imply $\mathbf{A} = 0$ everywhere?

1.5 Another Equation of Electrostatics and the Scalar Potential

$$\begin{aligned}
 & \nabla |\mathbf{x} - \mathbf{x}'|^n \\
 &= \frac{\partial}{\partial x} [(x - x')^2 + (y - y')^2 + (z - z')^2]^{\frac{n}{2}} \mathbf{e}_x \\
 & \quad + \frac{\partial}{\partial y} [(x - x')^2 + (y - y')^2 + (z - z')^2]^{\frac{n}{2}} \mathbf{e}_y \\
 & \quad + \frac{\partial}{\partial z} [(x - x')^2 + (y - y')^2 + (z - z')^2]^{\frac{n}{2}} \mathbf{e}_z \\
 &= \frac{n}{2} [(x - x')^2 + (y - y')^2 + (z - z')^2]^{\frac{n}{2}-1} 2(x - x') \mathbf{e}_x \\
 & \quad + \frac{n}{2} [(x - x')^2 + (y - y')^2 + (z - z')^2]^{\frac{n}{2}-1} 2(y - y') \mathbf{e}_y \\
 & \quad + \frac{n}{2} [(x - x')^2 + (y - y')^2 + (z - z')^2]^{\frac{n}{2}-1} 2(z - z') \mathbf{e}_z \\
 &= n |\mathbf{x} - \mathbf{x}'|^{n-2} (\mathbf{x} - \mathbf{x}') \tag{1}
 \end{aligned}$$

∇ operates on \mathbf{x} .
 ∇' operates on \mathbf{x}' .
 $\nabla' |\mathbf{x} - \mathbf{x}'|^n = -\nabla |\mathbf{x} - \mathbf{x}'|^n$

Ex: $\nabla |\mathbf{x} - \mathbf{x}'| = \frac{\mathbf{x} - \mathbf{x}'}{|\mathbf{x} - \mathbf{x}'|}$; $\nabla \frac{1}{|\mathbf{x} - \mathbf{x}'|} = -\frac{\mathbf{x} - \mathbf{x}'}{|\mathbf{x} - \mathbf{x}'|^3}$; $\nabla \frac{1}{|\mathbf{x} - \mathbf{x}'|^3} = -3 \frac{\mathbf{x} - \mathbf{x}'}{|\mathbf{x} - \mathbf{x}'|^5}$

1.5 Another Equation of Electrostatics and the Scalar Potential (continued)

$$\mathbf{E}(\mathbf{x}) = \frac{1}{4\pi\epsilon_0} \int \frac{\rho(\mathbf{x}')(\mathbf{x}-\mathbf{x}')}{|\mathbf{x}-\mathbf{x}'|^3} d^3x' = -\frac{1}{4\pi\epsilon_0} \nabla \int \frac{\rho(\mathbf{x}')}{|\mathbf{x}-\mathbf{x}'|} d^3x'$$

$$= -\nabla\Phi(\mathbf{x}), \quad \boxed{\nabla \frac{1}{|\mathbf{x}-\mathbf{x}'|} = -\frac{\mathbf{x}-\mathbf{x}'}{|\mathbf{x}-\mathbf{x}'|^3}}$$

where $\Phi(\mathbf{x}) \equiv \frac{1}{4\pi\epsilon_0} \int \frac{\rho(\mathbf{x}')}{|\mathbf{x}-\mathbf{x}'|} d^3x'$ [scalar potential] (1.17)


$$\Rightarrow \nabla \times \mathbf{E} = 0 \quad (1.14)$$

Question: $\mathbf{E} = -\nabla\Phi \Rightarrow \nabla \times \mathbf{E} = 0$. Is the reverse also true?

Below we show that $q\Phi(\mathbf{x})$ can be interpreted as the potential energy of charge q at position \mathbf{x} , and $\nabla \times \mathbf{E} = 0$ can be derived by an alternative method using Stokes's theorem:

$$\oint_C \mathbf{A} \cdot d\boldsymbol{\ell} = \int_S (\nabla \times \mathbf{A}) \cdot \mathbf{n} da$$

$d\boldsymbol{\ell}$: a line element on a closed loop C
 S : arbitrary open surface bounded by loop C
 \mathbf{n} : unit vector normal to surface element da in the direction given by the *right-hand rule*

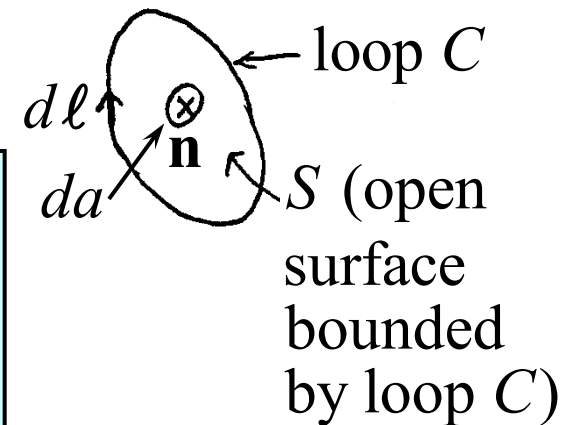

1.7 Poisson and Laplace Equations

$$\text{Rewrite } \begin{cases} \nabla \cdot \mathbf{E} = \frac{\rho}{\epsilon_0} \\ \mathbf{E} = -\nabla\Phi \end{cases} \quad \begin{matrix} (1.13) \\ (1.16) \end{matrix}$$


Sub. (1.13) into (1.16), we obtain the Poisson equation

$$\nabla^2\Phi = -\frac{\rho}{\epsilon_0} \quad (1.28)$$

In a charge-free region, (1.28) reduces to the Laplace equation

$$\nabla^2\Phi = 0 \quad (1.29)$$

Summary of Secs. 1-5 and 7:

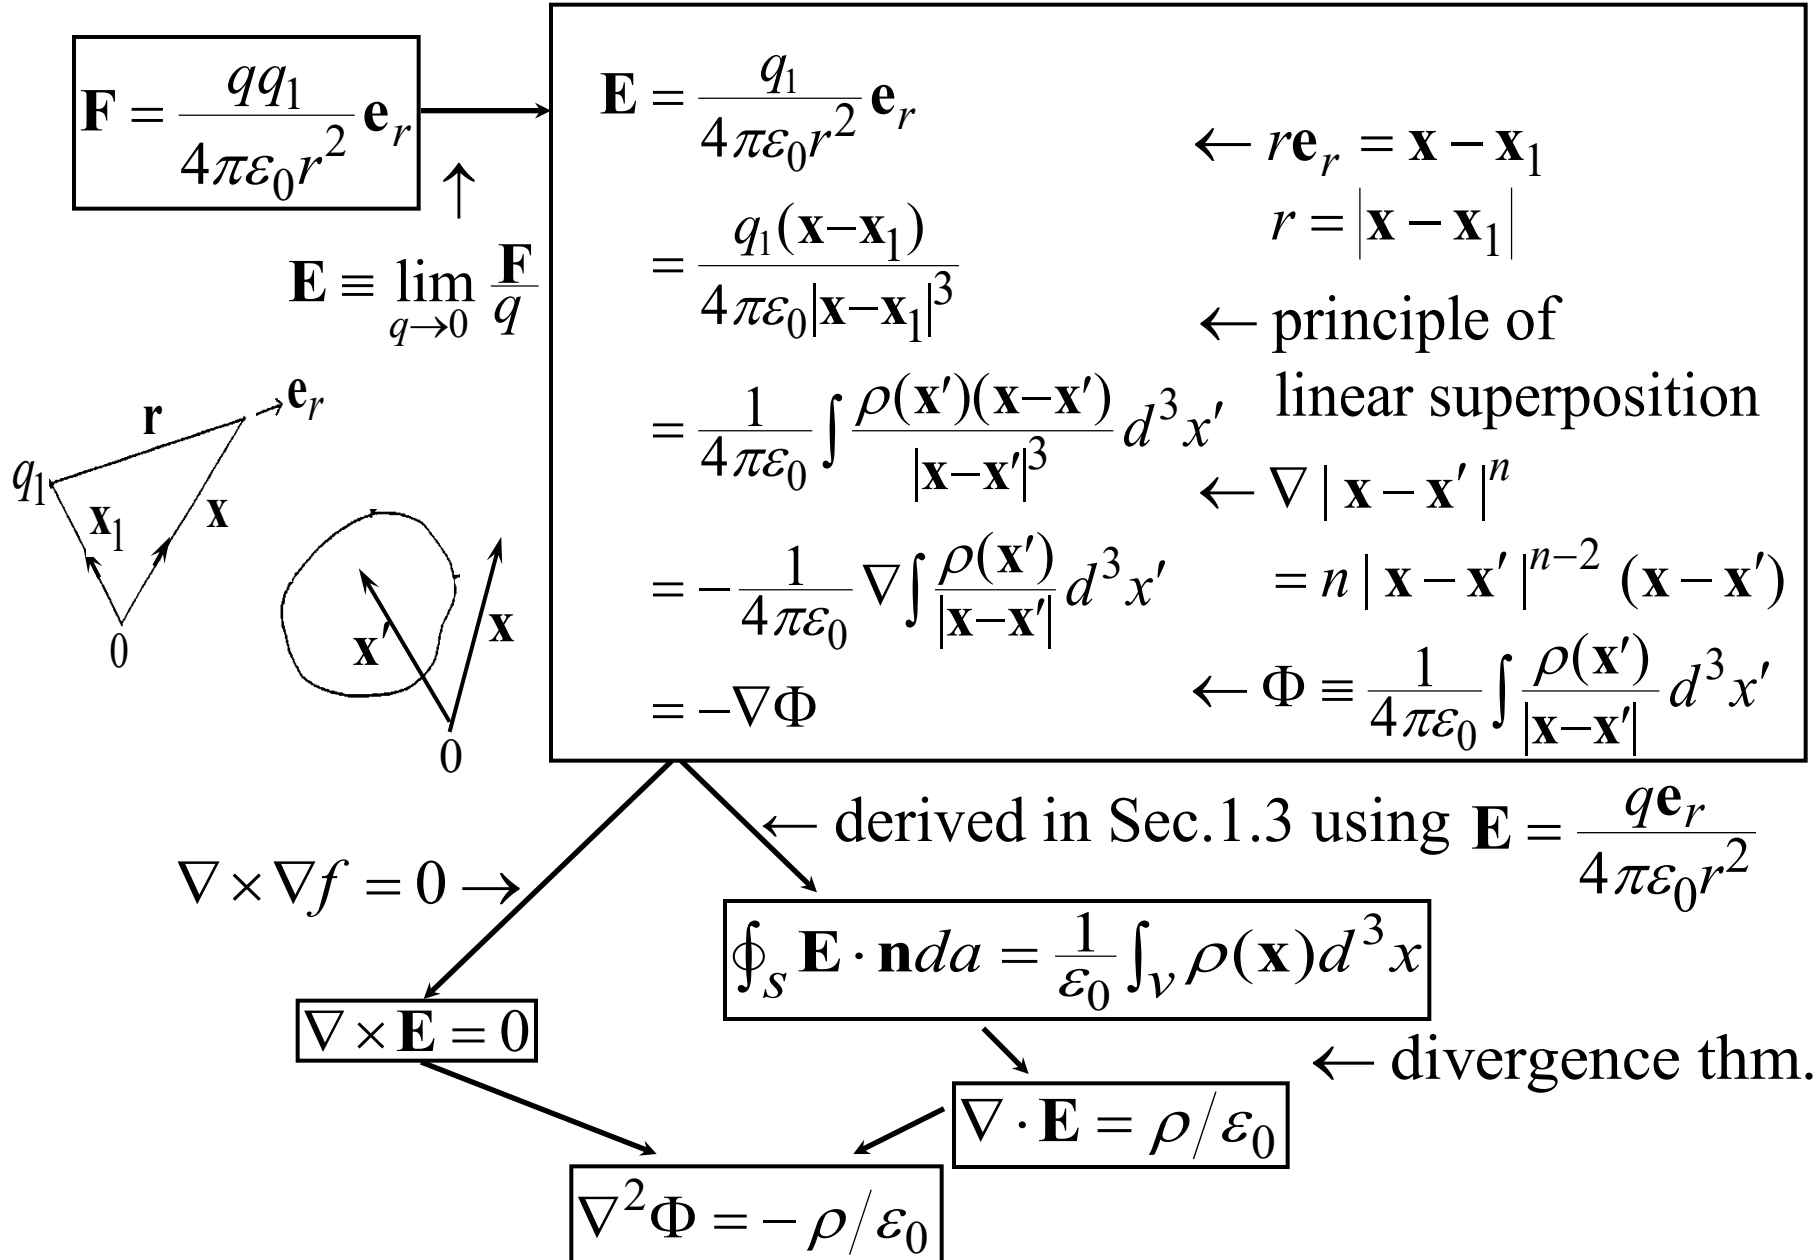

Questions on Secs. 1-5 and 7:

1. Can one calculate \mathbf{E} by using $\nabla \cdot \mathbf{E} = \rho / \epsilon_0$ alone?
2. Can one calculate Φ (hence \mathbf{E}) by using $\nabla^2 \Phi = -\rho / \epsilon_0$? How?
3. Can one calculate Φ (hence \mathbf{E}) by using $\Phi(\mathbf{x}) = \frac{1}{4\pi\epsilon_0} \int \frac{\rho(\mathbf{x}')}{|\mathbf{x}-\mathbf{x}'|} d^3x'$?
How?
4. Why break one equation, $\Phi(\mathbf{x}) = \frac{1}{4\pi\epsilon_0} \int \frac{\rho(\mathbf{x}')}{|\mathbf{x}-\mathbf{x}'|} d^3x'$, into two equations: $\nabla \times \mathbf{E} = 0$ and $\nabla \cdot \mathbf{E} = \rho / \epsilon_0$?
5. Coulomb's law gives $\nabla \times \mathbf{E} = 0$ and $\nabla \cdot \mathbf{E} = \rho / \epsilon_0$. Can it give any other independent relation for \mathbf{E} ?

Helmholtz's Theorem: "A vector is uniquely specified by giving its divergence and its curl within a region and its normal component over the boundary." (Arfken, "Math. Meth. for Physicists", 3rd Ed. p.78)

6. Is the integral form of Gauss's law *mathematically* equivalent to the differential form of Gauss's law?

Answer: Yes. To prove the mathematical equivalence, we need to show that the integral form of Gauss's law is both a *sufficient* and *necessary* condition for the differential form of Gauss's law. This can be demonstrated as follows:

$$\oint \mathbf{E} \cdot \mathbf{n} da = \frac{1}{\epsilon_0} \int_V \rho(\mathbf{x}) d^3x \quad (1.11)$$

$\uparrow \quad \downarrow \quad \leftarrow$ divergence thm.

$$\int_V (\nabla \cdot \mathbf{E} - \rho/\epsilon_0) d^3x = 0 \quad (\text{for arbitrary volume } V)$$

$\uparrow \quad \downarrow$

$$\nabla \cdot \mathbf{E} = \rho/\epsilon_0 \quad (1.13)$$

Downward manipulation (\downarrow) shows that (1.11) is a sufficient condition for (1.13). Upward manipulation (\uparrow) shows that (1.11) is a necessary condition for (1.13). Hence, the two forms of Gauss's law are mathematically equivalent.

7. Is Gauss's law *mathematically* equivalent to Coulomb's law?

Answer: No, because Coulomb's law is a sufficient but not a necessary condition for Gauss's law. That is, we may derive Gauss's law from Coulomb's law, but not the reverse.

While Coulomb's law completely specifies the \mathbf{E} field, we need more information to completely specify the \mathbf{E} field from Gauss's law. This is clear when we write Gauss's law in its differential form, $\nabla \cdot \mathbf{E} = \rho / \epsilon_0$. By Helmholtz's Theorem, we also need the curl of \mathbf{E} to completely specify \mathbf{E} . In electrostatics, this is given by $\nabla \times \mathbf{E} = 0$. In general, it is given by Faraday's law, $\nabla \times \mathbf{E} = -\partial \mathbf{B} / \partial t$ (Ch. 5).

As will be shown in later chapters, while Coulomb's law [in the form of (1.5) or (1.17)] deals only with the static \mathbf{E} field, Gauss's law covers a much broader class of fields than Coulomb's law, such as the \mathbf{E} field of an electromagnetic wave.

8. Is Gauss's law *physically* equivalent to Coulomb's law?

Answer: In the special case of electrostatics, the field surrounding a point charge is symmetric, implying $\mathbf{E}=E_r\mathbf{e}_r$. Choosing a spherical surface of radius r centered at the point charge, we may obtain Coulomb's law from Gauss's law,

$$\oint \mathbf{E} \cdot \mathbf{n} da = \frac{1}{\epsilon_0} \int_V \rho(\mathbf{x}) d^3x \quad (\text{Gauss's law})$$
$$\Rightarrow \oint \mathbf{E} \cdot d\mathbf{a} = E_r 4\pi r^2 = q/\epsilon_0$$
$$\Rightarrow E_r = \frac{q}{4\pi\epsilon_0 r^2} \quad (\text{Coulomb's law})$$

In 1.3, we have also derived Gauss's law from Coulomb's law; hence, the two laws are physically equivalent in electrostatics. However, as discussed in question 7, the two laws are not mathematically equivalent, nor are they physically equivalent in electrodynamics.

1.6 Surface Distributions of Charges and Dipoles and Discontinuities in the Electric Field and Potential


Surface Layer of Charge :

The surface charge density is defined as charge per unit area on the surface: $\sigma(\mathbf{x}) \equiv \lim_{\Delta a \rightarrow 0} \frac{\Delta q}{\Delta a}$

Note: σ and ρ have different dimensions.


Apply Gauss's law, $\oint \mathbf{E} \cdot \mathbf{n} da = \frac{q}{\epsilon_0}$, to an infinitesimally thin pillbox, we obtain

$$\begin{aligned} (\mathbf{E}_1 \cdot \mathbf{n}_1 + \mathbf{E}_2 \cdot \mathbf{n}_2) \Delta a &= \frac{\Delta q}{\epsilon_0} \\ \mathbf{n}_1 &= -\mathbf{n}_2 \\ \Rightarrow (\mathbf{E}_2 - \mathbf{E}_1) \cdot \mathbf{n}_2 &= \frac{1}{\epsilon_0} \frac{\Delta q}{\Delta a} = \frac{\sigma}{\epsilon_0} \end{aligned} \quad (1.22)$$

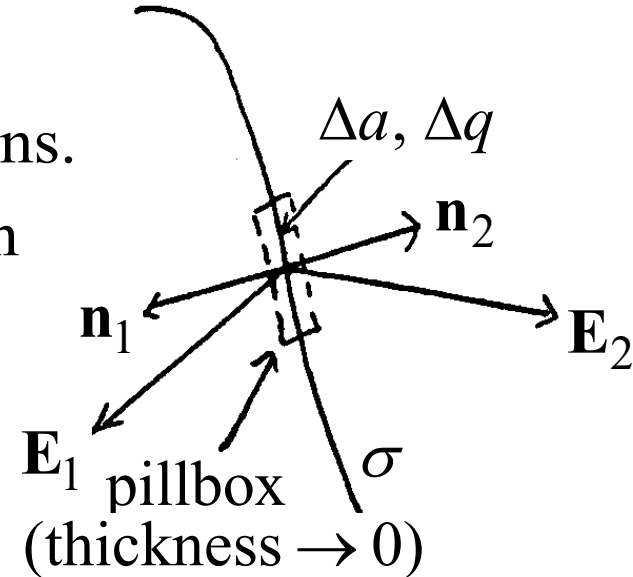

The tangential component of \mathbf{E} can be shown to be continuous across the layer by applying $\oint_C \mathbf{E} \cdot d\ell = 0$ to the loop drawn in dashed lines in the figure.

1.6 Surface Distributions of Charges and Dipoles... (continued)

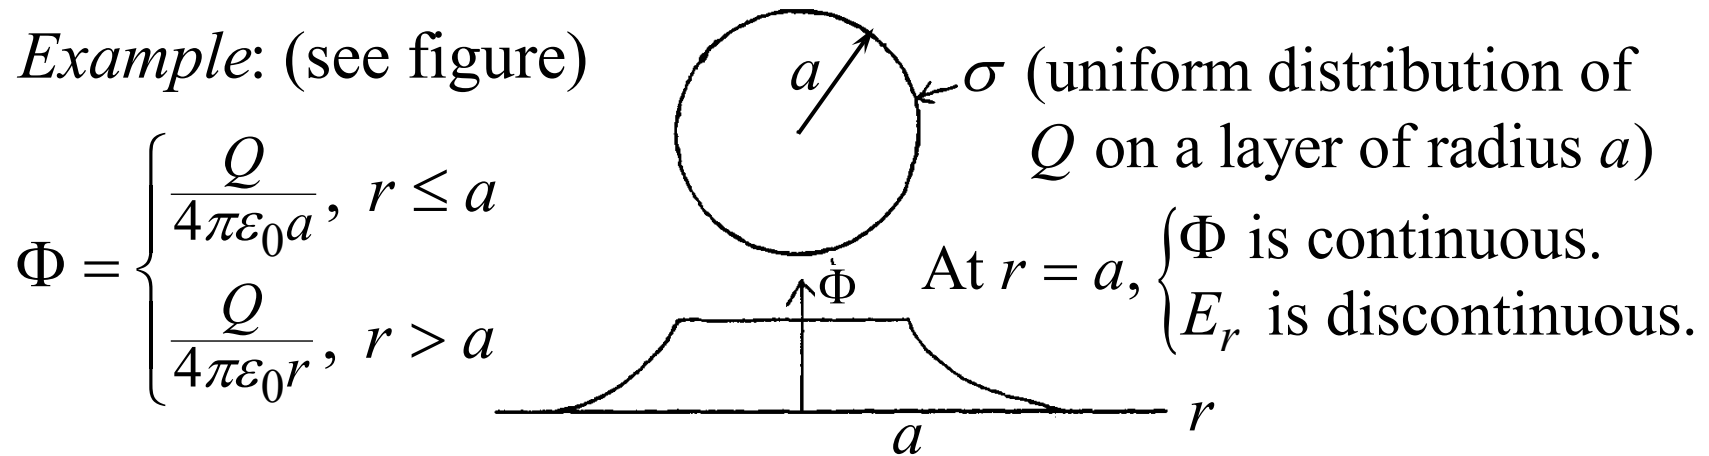

Questions :

1. Fields (E and Φ) of a *point* charge diverge as one moves infinitesimally close to the charge. Explain why fields of the *surface* charge do not diverge as one moves infinitesimally close to the surface.

Answer: A point charge is a finite amount of charge concentrated at a *point*. However, for the surface charge, one must integrate σ over a finite surface area to obtain a finite amount of charge. Hence, there is no finite amount charge at a single point on the layer.

2. Why is Φ continuous across the layer?

1.11 Electrostatic Potential Energy and Energy Density; Capacitance

Electric Field Energy: Let $\Phi(\mathbf{x})$ be the field due to the presence of ρ . The work done to add $\delta\rho$ is

$$\delta W = \int \delta\rho(\mathbf{x})\Phi(\mathbf{x})d^3x$$

$$\delta\rho = \epsilon_0 \nabla \cdot \delta\mathbf{E} \rightarrow = \epsilon_0 \int \Phi \nabla \cdot \delta\mathbf{E}(\mathbf{x})d^3x$$

Using $\nabla \cdot \psi \mathbf{a} = \mathbf{a} \cdot \nabla \psi + \psi \nabla \cdot \mathbf{a}$ we obtain
 $\Phi \nabla \cdot \delta\mathbf{E} = \nabla \cdot (\Phi \delta\mathbf{E}) - \delta\mathbf{E} \cdot \nabla \Phi$
 $= \nabla \cdot (\Phi \delta\mathbf{E}) + \mathbf{E} \cdot \delta\mathbf{E}$

$$= \epsilon_0 \int \nabla \cdot (\Phi \delta\mathbf{E})d^3x + \epsilon_0 \int \mathbf{E} \cdot \delta\mathbf{E}d^3x = \epsilon_0 \int \mathbf{E} \cdot \delta\mathbf{E}d^3x$$

By conservation of energy, this must be the total E-field energy.

$$= \oint_S \underbrace{\Phi}_{\frac{1}{r}} \underbrace{\delta\mathbf{E}}_{\frac{1}{r^2}} \cdot \underbrace{d\mathbf{a}}_{r^2} = 0, \text{ as } r \rightarrow \infty$$

[For this integral to vanish, the volume of integration must be infinite.]

$$\Rightarrow W = \epsilon_0 \int d^3x \int_0^E \mathbf{E} \cdot d\mathbf{E} = \frac{\epsilon_0}{2} \int |\mathbf{E}|^2 d^3x \leftarrow \text{infinite volume} \quad (1.54)$$

$$|\mathbf{E}|^2 = \mathbf{E} \cdot \mathbf{E} = -\mathbf{E} \cdot \nabla \Phi = -\nabla \cdot (\Phi \mathbf{E}) + \Phi \nabla \cdot \mathbf{E} = -\nabla \cdot (\Phi \mathbf{E}) + \frac{\rho \Phi}{\epsilon_0}$$

$$\Rightarrow W = \frac{1}{2} \int \rho(\mathbf{x})\Phi(\mathbf{x})d^3x - \frac{\epsilon_0}{2} \underbrace{\oint_S \Phi \mathbf{E} \cdot d\mathbf{a}}_{\rightarrow 0 \text{ as } r \rightarrow \infty} = \frac{1}{2} \int \rho(\mathbf{x})\Phi(\mathbf{x})d^3x \quad (1.53)$$

1.5 Another Equation of Electrostatics and the Scalar Potential (continued)

Self-learning

Work done by bringing charge q from position A to position B along any path:


$$W = -\int_A^B \mathbf{F} \cdot d\boldsymbol{\ell}$$

$$= -q \int_A^B \mathbf{E} \cdot d\boldsymbol{\ell}$$

$$= q \int_A^B \nabla\Phi \cdot d\boldsymbol{\ell}$$

$$= q \int_A^B d\Phi$$

$$= q(\Phi_B - \Phi_A)$$



$$\nabla\Phi = \frac{\partial\Phi}{\partial x} \mathbf{e}_x + \frac{\partial\Phi}{\partial y} \mathbf{e}_y + \frac{\partial\Phi}{\partial z} \mathbf{e}_z; \quad d\boldsymbol{\ell} = dx\mathbf{e}_x + dy\mathbf{e}_y + dz\mathbf{e}_z$$

$$\Rightarrow d\Phi = \nabla\Phi \cdot d\boldsymbol{\ell} = \frac{\partial\Phi}{\partial x} dx + \frac{\partial\Phi}{\partial y} dy + \frac{\partial\Phi}{\partial z} dz$$

$\Rightarrow d\Phi$ is an infinitesimal change of Φ due to an infinitesimal displacement $d\boldsymbol{\ell}$.

Thus, W depends only on the values of Φ at A and B , and it is independent of the charge's path from A to B . This justifies the concept of potential energy, which implies that the total work done on q in a round trip along any closed path C is 0, i.e.


$$\oint_C \mathbf{E} \cdot d\boldsymbol{\ell} = 0 \quad \text{or, by Stokes's theorem,} \quad \int_S (\nabla \times \mathbf{E}) \cdot \mathbf{n} \, da = 0 \quad (1.21)$$

Since S is an arbitrary surface, we obtain $\nabla \times \mathbf{E} = 0$.

Self-learning

An alternative derivation of (1.53) and (1.54): Consider a state in which a charge density $\rho(\mathbf{x})$ has produced an electrostatic potential $\Phi(\mathbf{x})$, i.e. $\rho(\mathbf{x}) \rightarrow \Phi(\mathbf{x})$.

Then, by the principle of linear superposition, we have $\varepsilon\rho(\mathbf{x}) \rightarrow \varepsilon\Phi(\mathbf{x})$, where ε is a constant.

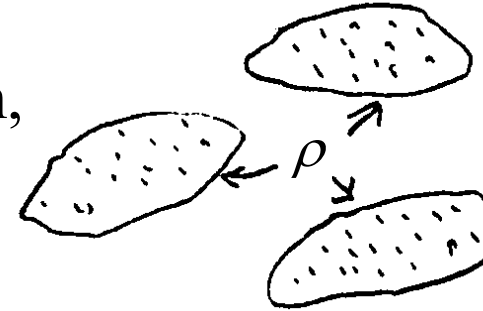

To find the electric field energy, we consider the energy needed to build up $\Phi(\mathbf{x})$ from $\varepsilon = 0$ (no charge and no potential) to $\varepsilon = 1$ (the present state). At any stage in the build-up process, the relative charge density (hence the relative potential) remains the same; namely, the intermediate state is characterized by the charge density $\varepsilon\rho(\mathbf{x})$ and potential $\varepsilon\Phi(\mathbf{x})$.

In such a build-up process, when the potential is $\varepsilon\Phi(\mathbf{x})$, the work done by adding an incremental charge $\rho(\mathbf{x})d\varepsilon$ is

$$dW = \int_V d^3x \varepsilon\Phi(\mathbf{x})\rho(\mathbf{x})d\varepsilon$$

Hence, the total work done from $\epsilon = 0$ to $\epsilon = 1$ is

$$W = \int_{\epsilon=0}^{\epsilon=1} dW = \int_V d^3x \rho(\mathbf{x}) \Phi(\mathbf{x}) \int_0^1 \epsilon d\epsilon$$

$$= \frac{1}{2} \int_V d^3x \underbrace{\rho(\mathbf{x})}_{-\epsilon_0 \nabla^2 \Phi} \Phi(\mathbf{x}) \quad \text{For this integral to vanish, the volume of integration must be } \infty. \quad (1.53)$$

$$= -\frac{1}{2} \epsilon_0 \int_V \Phi \nabla^2 \Phi d^3x \xrightarrow{\text{Green's 1st identity}} \frac{1}{2} \epsilon_0 \left[\int_V \nabla \Phi \cdot \nabla \Phi d^3x - \oint_S \Phi \left(\frac{\partial \Phi}{\partial n} \right) da \right]$$

$$= \frac{1}{2} \epsilon_0 \int_V |\mathbf{E}|^2 d^3x \quad \leftarrow \text{integration over infinite volume} \quad \left[\begin{matrix} \sim \frac{1}{r} \\ \sim \frac{1}{r^2} \end{matrix} \right] \quad (1.54)$$


- Questions:** 1. If we bring q and $-q$ toward each other, the work done is negative. Why is then $W = \frac{\epsilon_0}{2} \int_V |\mathbf{E}|^2 d^3x$ always positive?
2. Give one example to show that the \mathbf{E} -field carries energy.

Electric Field Energy Density : $(1.54) \Rightarrow w_E = \frac{1}{2} \epsilon_0 |\mathbf{E}|^2 \quad (1.55)$


Note: $w_E = \frac{1}{2} \epsilon_0 |\mathbf{E}|^2 = \frac{1}{2} \epsilon_0 (\sum_j \mathbf{E}_j) \cdot (\sum_j \mathbf{E}_j) \left[\neq \frac{1}{2} \epsilon_0 \sum_j (\mathbf{E}_j \cdot \mathbf{E}_j) \right]$

Self-learning

Force on the Surface of a Conductor: Consider a conductor with surface charge on it. At any point on the surface, the *total* field (\mathbf{E}) outside must be normal to the surface and the total field inside must be 0. Applying Gauss's law, we find $E = \sigma / \epsilon_0$, where σ is the local surface charge density at the observation point (upper figure). But the local σ by itself will produce equal and opposite fields on both sides of σ (call it *self* field E_{self}) and by Gauss's law

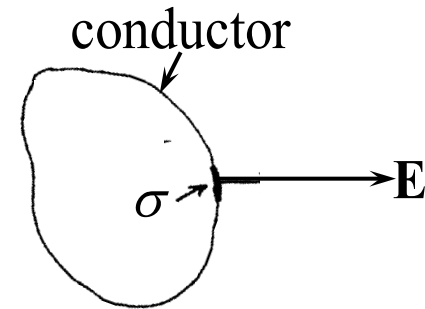

$$E_{self}(\text{outside}) + E_{self}(\text{inside}) = \frac{\sigma}{\epsilon_0} \Rightarrow E_{self} = \frac{\sigma}{2\epsilon_0},$$



which is half of the total E outside. Since the total E inside is 0, all the external surface charge away from the local σ must have produced an *external* field with $E_{ext} = E_{self} = \sigma / 2\epsilon_0$, which cancels E_{self} (inside) and thus doubles E_{self} (outside). The local σ can only experience a force due to the field (E_{ext}) produced by the external surface charge. Thus,


$$\text{force on the surface/unit area} = \sigma E_{ext} = \frac{\sigma^2}{2\epsilon_0} \quad (\text{see pp. 42-43})$$

Self-learning

Capacitance: Refer to the figure

$$\left\{ \begin{array}{l} V_1 = \sum_{j=1}^n P_{1j} Q_j \\ V_2 = \sum_{j=1}^n P_{2j} Q_j \\ \vdots \\ V_n = \sum_{j=1}^n P_{nj} Q_j \end{array} \right. \quad \Rightarrow \quad \left\{ \begin{array}{l} Q_1 = \sum_{j=1}^n C_{1j} V_j \\ Q_2 = \sum_{j=1}^n C_{2j} V_j \\ \vdots \\ Q_n = \sum_{j=1}^n C_{nj} V_j \end{array} \right.$$

Invert the equations

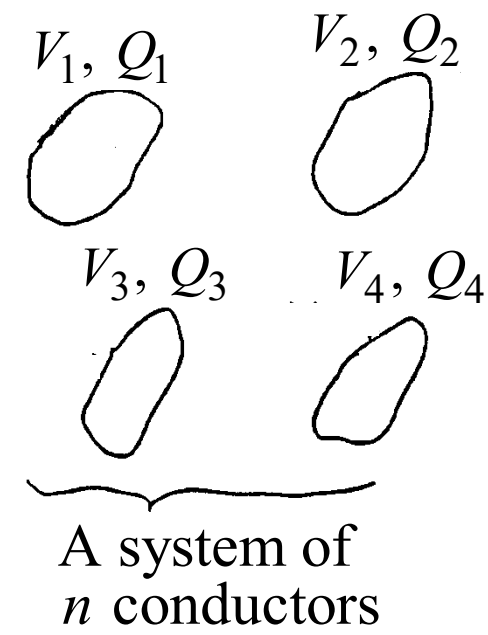

by principle of linear superposition

C_{ii} : capacitance
 C_{ij} ($i \neq j$): coefficient of induction

P_{ij} and C_{ij} depend on the geometrical shape and position of the conductors. Potential energy of the i -th conductor is [using (1.53)]

$$\begin{aligned}
 W_i &= \frac{1}{2} \int \rho_i(\mathbf{x}) \Phi_i(\mathbf{x}) d^3x = \frac{1}{2} Q_i V_i \quad \left[\Phi_i(\mathbf{x}) = V_i; \int \rho_i(\mathbf{x}) d^3x = Q_i \right] \\
 \Rightarrow \left[\begin{array}{l} \text{Potential energy} \\ \text{of the system} \end{array} \right] &= \frac{1}{2} \sum_{i=1}^n Q_i V_i = \frac{1}{2} \sum_{i=1}^n \sum_{j=1}^n C_{ij} V_i V_j \quad (1.62)
 \end{aligned}$$

Homework of Chap. 1

Problem 1.3

Using Dirac delta functions in the appropriate coordinates, express the following charge distributions as three-dimensional charge densities $\rho(\mathbf{x})$.

- (a) In spherical coordinates, a charge Q uniformly distributed over a spherical shell of radius R .
- (b) In cylindrical coordinates, a charge λ per unit length uniformly distributed over a cylindrical surface of radius b .
- (c) In cylindrical coordinates, a charge Q spread uniformly over a flat circular disc of negligible thickness and radius R .
- (d) The same as part (c), but using spherical coordinates.

Problem 1.4

Each of three charged spheres of radius a , one conducting, one having a uniform charge density within its volume, and one having a spherically symmetric charge density that varies radially as r^n ($n > -3$), has a total charge Q . Use Gauss's theorem to obtain the electric fields both inside and outside each sphere. Sketch the behavior of the fields as a function of radius for the first two spheres, and for the third with $n = -2, +2$.

Problem 1.5

The time-averaged potential of a neutral hydrogen atom is given by

$$\Phi = \frac{q}{4\pi\epsilon_0} \frac{e^{-\alpha r}}{r} \left(1 + \frac{\alpha r}{2} \right)$$

where q is the magnitude of the electronic charge, and $\alpha = a_0 / 2$, a_0 being the Bohr radius. Find the distribution of charge (both continuous and discrete) that will give this potential and interpret your result physically.

Homework of Chap. 1

Problem 1.6

A simple capacitor is a device formed by two insulated conductors adjacent to each other. If equal and opposite charges are placed on the conductors, there will be a certain difference of potential between them. The ratio of the magnitude of the charge on one conductor to the magnitude of the potential difference is called the capacitance (in SI unit it is measured in farads). Using Gauss's law, calculate the capacitance of

- (a) two large, flat, conducting sheets of area A , separated by a small distance d ;
- (b) two concentric conducting spheres with radii a , b ($b > a$);
- (c) two concentric conducting cylinders of length L , large compared to their radii a , b ($b > a$).
- (d) What is the inner diameter of the outer conductor in an air-filled coaxial cable whose center conductor is a cylindrical wire of diameter 1 mm and whose capacitance is $3 \times 10^{-11} \text{F/m}$?

Problem 1.8

- (a) For the three capacitor geometries in Problem 1.6 calculate the total electrostatic energy and express it alternatively in terms of the equal and opposite charges Q and $-Q$ placed on the conductors and the potential difference between them.
- (b) Sketch the energy density of the electrostatic field in each case as a function of the appropriate linear coordinate.

Problem 1.9

Calculate the attractive force between conductors in the parallel plate capacitor (Problem 1.6a) and the parallel cylinder capacitor (Problem 1.7) for

- (a) Fixed charges on each conductor;
- (b) Fixed potential difference between conductors.

Homework of Chap. 1

Problem 1.14

Consider the electrostatic Green functions of Section 1.10 for Dirichlet and Neumann boundary conditions on the surface S bounding the volume V . Apply Green's theorem (1.35) with integration variable \mathbf{y} and $\phi = G(\mathbf{x}, \mathbf{y}), \psi = G(\mathbf{x}', \mathbf{y}')$, with $\nabla^2_{\mathbf{y}} G(\mathbf{z}, \mathbf{y}) = -4\pi\delta(\mathbf{y} - \mathbf{z})$. Find an expression for the difference $[G(\mathbf{x}, \mathbf{x}') - G(\mathbf{x}', \mathbf{x})]$ in terms of an integral over the boundary surface S .

- (a) For Dirichlet boundary conditions on the potential and the associated boundary condition on the Green function, show that $G_D(\mathbf{x}, \mathbf{x}')$ must be symmetric in \mathbf{x} and \mathbf{x}' .
- (b) For Neumann boundary conditions, use the boundary condition (1.45) for $G_N(\mathbf{x}, \mathbf{x}')$ to show that $G_N(\mathbf{x}, \mathbf{x}')$ is not symmetric in general, but that $G_N(\mathbf{x}, \mathbf{x}') - F(\mathbf{x})$ is symmetric in \mathbf{x} and \mathbf{x}' , where

$$F(\mathbf{x}) = \frac{1}{S} \oint_S G_N(\mathbf{x}, \mathbf{y}) da_y$$

Problem 1.16

Prove the following theorem: If a number of surfaces are fixed in position with a given total charge on each, the introduction of an uncharged, insulated conductor into the region bounded by the surfaces lowers the electrostatic energy.

Problem 1.17

A volume V in vacuum is bounded by a surface S consisting of several separate conducting surfaces S_i . One conductor is held at unit potential and all the other conductors at zero potential.

- (a) Show that the capacitance of the one conductor is given by $C = \epsilon_0 \int_V |\nabla\Phi|^2 d^3x$

where $\Phi(\mathbf{x})$ is the solution for the potential.

- (b) Show that the true capacitance C is always less than or equal to the quantity $C[\Psi] = \epsilon_0 \int_V |\nabla\Psi|^2 d^3x$

where Ψ is any trial function satisfying the boundary conditions on the conductors. This is a variation principle for the capacitance that yields an *upper bound*.

Appendix A: Unit Systems and Dimensions

Unit Systems:

Two systems of electromagnetic units are in common use today: the SI and Gaussian systems. Regardless of one's personal preference, it is important to be familiar with both systems and, in particular, the conversion from one system to the other. Conversion formulae can be divided into two categories: “symbol/equation conversion [such as E and $E = q/(4\pi\epsilon_0 r^2)$]” and “unit conversion (such as coulomb)”.

Conversion formulae for symbols and equations are listed in Table 3 on p. 782 of Jackson and conversion formulae for units in Table 4 on p. 783 (both tables attached on next page). These two tables are all we need to convert between SI and Gaussian systems. Correct use of the tables requires practices.

Appendix A: Unit Systems and Dimensions (*continued*)

Table 3 Conversion Table for Symbols and Formulas

The symbols for mass, length, time, force, and other not specifically electromagnetic quantities are unchanged. To convert any equation in SI variables to the corresponding equation in Gaussian quantities, on both sides of the equation replace the relevant symbols listed below under “SI” by the corresponding “Gaussian” symbols listed on the left. The reverse transformation is also allowed. Residual powers of $\mu_0\epsilon_0$ should be eliminated in favor of the speed of light ($c^2\mu_0\epsilon_0 = 1$). Since the length and time symbols are unchanged, quantities that differ dimensionally from one another only by powers of length and/or time are grouped together where possible.

Quantity	Gaussian	SI
Velocity of light	c	$(\mu_0\epsilon_0)^{-1/2}$
Electric field (potential, voltage)	$\mathbf{E}(\Phi, V)/\sqrt{4\pi\epsilon_0}$	$\mathbf{E}(\Phi, V)$
Displacement	$\sqrt{\epsilon_0/4\pi} \mathbf{D}$	\mathbf{D}
Charge density (charge, current density, current, polarization)	$\sqrt{4\pi\epsilon_0} \rho(q, \mathbf{J}, I, \mathbf{P})$	$\rho(q, \mathbf{J}, I, \mathbf{P})$
Magnetic induction	$\sqrt{\mu_0/4\pi} \mathbf{B}$	\mathbf{B}
Magnetic field	$\mathbf{H}/\sqrt{4\pi\mu_0}$	\mathbf{H}
Magnetization	$\sqrt{4\pi/\mu_0} \mathbf{M}$	\mathbf{M}
Conductivity	$4\pi\epsilon_0\sigma$	σ
Dielectric constant	$\epsilon_0\epsilon$	ϵ
Magnetic permeability	$\mu_0\mu$	μ
Resistance (impedance)	$R(Z)/4\pi\epsilon_0$	$R(Z)$
Inductance	$L/4\pi\epsilon_0$	L
Capacitance	$4\pi\epsilon_0C$	C

$$c = 2.997\,924\,58 \times 10^8 \text{ m/s}$$

$$\epsilon_0 = 8.854\,187\,8 \dots \times 10^{-12} \text{ F/m}$$

$$\mu_0 = 1.256\,637\,0 \dots \times 10^{-6} \text{ H/m}$$

$$\sqrt{\frac{\mu_0}{\epsilon_0}} = 376.730\,3 \dots \Omega$$

Table 4 Conversion Table for Given Amounts of a Physical Quantity

The table is arranged so that a given amount of some physical quantity, expressed as so many SI or Gaussian units of that quantity, can be expressed as an equivalent number of units in the other system. Thus the entries in each row stand for the same amount, expressed in different units. All factors of 3 (apart from exponents) should, for accurate work, be replaced by (2.997 924 58), arising from the numerical value of the velocity of light. For example, in the row for displacement (D), the entry ($12\pi \times 10^5$) is actually ($2.997\,924\,58 \times 4\pi \times 10^5$) and “9” is actually $10^{-16} c^2 = 8.987\,55 \dots$. Where a name for a unit has been agreed on or is in common usage, that name is given. Otherwise, one merely reads so many Gaussian units, or SI units.

Physical Quantity	Symbol	SI	Gaussian
Length	l	1 meter (m)	10^2 centimeters (cm)
Mass	m	1 kilogram (kg)	10^3 grams (g)
Time	t	1 second (s)	1 second (s)
Frequency	ν	1 hertz (Hz)	1 hertz (Hz)
Force	F	1 newton (N)	10^5 dynes
Work	W	1 joule (J)	10^7 ergs
Energy	U		
Power	P	1 watt (W)	10^7 ergs s^{-1}
Charge	q	1 coulomb (C)	3×10^9 statcoulombs
Charge density	ρ	1 C m^{-3}	3×10^3 statcoul cm^{-3}
Current	I	1 ampere (A)	3×10^9 statamperes
Current density	J	1 A m^{-2}	3×10^5 statamp cm^{-2}
Electric field	E	1 volt m^{-1} (Vm^{-1})	$\frac{1}{3} \times 10^{-4}$ statvolt cm^{-1}
Potential	Φ, V	1 volt (V)	$\frac{1}{300}$ statvolt
Polarization	P	1 C m^{-2}	3×10^5 dipole moment cm^{-3}
Displacement	D	1 C m^{-2}	$12\pi \times 10^5$ statvolt cm^{-1} (statcoul cm^{-2})
Conductivity	σ	1 mho m^{-1}	9×10^9 s^{-1}
Resistance	R	1 ohm (Ω)	$\frac{1}{9} \times 10^{-11}$ s cm^{-1}
Capacitance	C	1 farad (F)	9×10^{11} cm
Magnetic flux	ϕ, F	1 weber (Wb)	10^8 gauss cm^2 or maxwells
Magnetic induction	B	1 tesla (T)	10^4 gauss (G)
Magnetic field	H	1 A m^{-1}	$4\pi \times 10^{-3}$ oersted (Oe)
Magnetization	M	1 A m^{-1}	10^{-3} magnetic moment cm^{-3}
Inductance*	L	1 henry (H)	$\frac{1}{9} \times 10^{-11}$

Conversion of symbols and equations:

Consider, for example, the conversion of the SI equation

$$E = \frac{q}{4\pi\epsilon_0 r^2} \quad (\text{A.1})$$

into the Gaussian system.

This involves the conversion of symbols and equations. So we use Table 3. First, we note from Table 3 (top) that mechanical symbols (e.g. time, length, mass, force, energy, and frequency) are unchanged in the conversion. Thus, we only need to deal with electromagnetic symbols on *both* sides of (A.1).

$$\text{From Table 3, we find } E^{SI} \rightarrow \frac{E^G}{\sqrt{4\pi\epsilon_0}} \text{ and } q^{SI} \rightarrow \sqrt{4\pi\epsilon_0} q^G \quad (\text{A.2})$$

Sub. $E^G / \sqrt{4\pi\epsilon_0}$ and $\sqrt{4\pi\epsilon_0} q^G$, respectively, for E and q in (A.1), we obtain the corresponding equation in the Gaussian system:

$$\frac{E^G}{\sqrt{4\pi\epsilon_0}} = \frac{\sqrt{4\pi\epsilon_0} q^G}{4\pi\epsilon_0 r^2} \Rightarrow E^G = \frac{q^G}{r^2} \quad (\text{A.3})$$

Conversion of units and evaluation of physical quantities:

Consider again the SI equation : $E = \frac{q}{4\pi\epsilon_0 r^2}$ (A.1)

Given $r = 0.01$ m, $q = 1$ statcoulomb, we may evaluate E in 3 steps:

Step 1: Express r , q , and ϵ_0 in SI units. From Table 3 (bottom) and Table 4, we find

$$\begin{cases} \epsilon_0 = 8.854 \times 10^{-12} \text{ Farad/m} = \frac{1}{36\pi \times 10^9} \text{ Farad/m} \\ r = 0.01 \text{ m (same as given)} \\ q (= 1 \text{ statcoulomb}) = \frac{1}{3 \times 10^9} \text{ coulomb} \end{cases} \quad (\text{A.4})$$

Step 2: Sub. the numbers (*but not the units*) from (A.4) into (A.1).

$$\text{This gives } E = \frac{q}{4\pi\epsilon_0 r^2} = \frac{\frac{1}{3 \times 10^9}}{4\pi \times \frac{1}{36\pi \times 10^9} \times (0.01)^2} = 3 \times 10^4$$

Step 3: Look up Table 4 for the SI unit of E . As shown in Table 4, the SI unit of E is V/m. Thus, $E = 3 \times 10^4$ V/m (A.5)

As another exercise, we write (A.1) in the Gaussian system :

$$E = \frac{q}{r^2} \quad (\text{A.3})$$

and evaluate E for the same r ($= 0.01$ m) and q ($= 1$ statcoulomb).

Step 1: Express r and q in Gaussian units. From Table 4, we find

$$\left\{ \begin{array}{l} r(= 0.01 \text{ m}) = 1 \text{ cm} \\ q = 1 \text{ statcoulomb (same as given)} \end{array} \right. \quad (\text{A.6})$$

Step 2: Sub. the numbers (*but not the units*) from (A.6) into (A.3).

$$\text{This gives } E = \frac{q}{r^2} = \frac{1}{1} = 1$$

Step 3: Look up Table 4 for the Gaussian unit of E . We find the unit to be statvolt/cm. Thus, $E = 1$ statvolt/cm (A.7)

Table 4 shows $1 \text{ statvolt/cm} = 3 \times 10^4 \text{ V/m}$. Hence, the 2 results

in (A.5) and (A.7): $\left\{ \begin{array}{l} E = 3 \times 10^4 \text{ V/m} \\ E = 1 \text{ statvolt/cm} \end{array} \right\}$ are identical as expected.

Units and Dimensions :

In the Gaussian system, the basic units are length (ℓ), mass (m), and time (t). In the SI system, they are the above plus the current (I). [See Table 1 (top) on p. 779 of Jackson.] All other units are derived units.

If a physical quantity is expressed in term of the basic units, we have the dimension of this quantity.

A mechanical quantity has the same dimension in both systems. For example, the acceleration $a (= d^2x / dt^2)$ has the dimension of ℓt^{-2} . From $f = ma$, we obtain the dimension of force: $m\ell t^{-2}$, which in turn gives the dimension of work ($f \cdot \ell$) or energy: $m\ell^2 t^{-2}$.

An electromagnetic quantity has different dimensions in different systems. For example, the charge q has the SI dimension of It . From the Gaussian equation $f = q_1 q_2 / r^2$ and the dimensions of force and length, we find the Gaussian dimension of q to be $m^{1/2} \ell^{3/2} t^{-1}$. Since $q\phi$ has the dimension of energy ($m\ell^2 t^{-2}$), the potential ϕ has the SI dimension of $m\ell^2 t^{-3} I^{-1}$ and the Gaussian dimension of $m^{1/2} \ell^{1/2} t^{-1}$.

Appendix A: Unit Systems and Dimensions (*continued*)

All physical quantities in an equation must be expressed in the same unit system and all terms must have the same dimension. For example, by Stokes's theorem, we have

$$\oint_C \mathbf{E} \cdot d\boldsymbol{\ell} = \int_S (\nabla \times \mathbf{E}) \cdot \mathbf{n} \, da \quad (\text{A.8})$$

where both terms have the dimension of $\ell \cdot$ (the dimension of E).

In the definition of the delta function:

$$\int_{a_1}^{a_2} \delta(x - a) dx = 1, \quad (\text{A.9})$$


the RHS is dimensionless. Thus, if x has the dimension of ℓ , $\delta(x - a)$ must have the dimension of ℓ^{-1} . However, "0" is *not* to be regarded as a dimensionless quantity. This is clear if we write (A.8) as

$$\oint_C \mathbf{E} \cdot d\boldsymbol{\ell} - \int_S (\nabla \times \mathbf{E}) \cdot \mathbf{n} \, da = 0.$$

Well known equations need not be checked for dimensional consistency. However, for newly derived equations, a dimensional check can be a convenient way to find mistakes.

Dipole Layer :

$$D(\mathbf{x}) \equiv \lim_{d(\mathbf{x}) \rightarrow 0} \sigma(\mathbf{x})d(\mathbf{x})$$

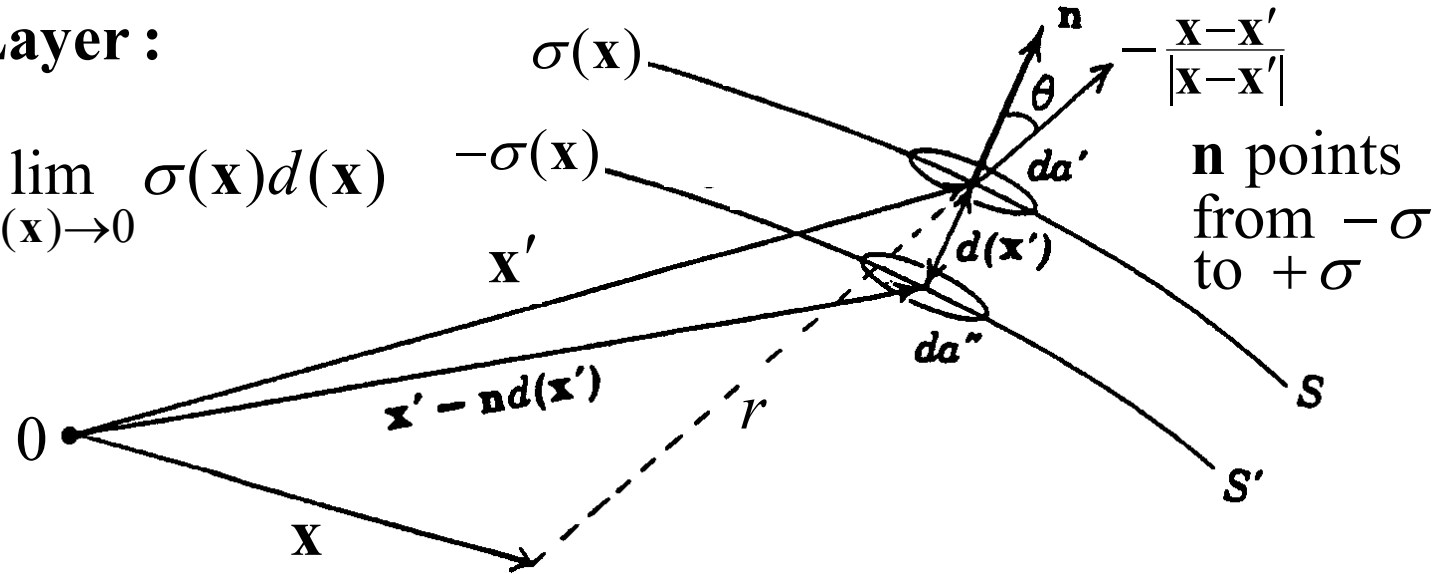

Assume that, at any given point, the two layers have equal and opposite surface charge densities (see figure).

$$\Phi(\mathbf{x}) = \frac{1}{4\pi\epsilon_0} \int \frac{\rho(\mathbf{x}')}{|\mathbf{x} - \mathbf{x}'|} d^3x' = \frac{1}{4\pi\epsilon_0} \left[\int_S \frac{\sigma(\mathbf{x}')}{|\mathbf{x} - \mathbf{x}'|} da' - \int_{S'} \frac{\sigma(\mathbf{x}')}{|\mathbf{x} - (\mathbf{x}' - \mathbf{n}d)|} da'' \right]$$

$$\boxed{da' = da''}$$

$$\downarrow \equiv \frac{1}{4\pi\epsilon_0} \int_S \sigma(\mathbf{x}') \left[\frac{1}{|\mathbf{x} - \mathbf{x}'|} - \frac{1}{|\mathbf{x} - (\mathbf{x}' - \mathbf{n}d)|} \right] da'$$

Using the binomial expansion:

What is the Taylor expansion?

$$(x + y)^n = x^n + nx^{n-1}y + \frac{n(n-1)}{2!}x^{n-2}y^2 + \dots,$$

we obtain

$$\begin{aligned} \frac{1}{|\mathbf{b} + \mathbf{a}|} &= \frac{1}{(b^2 + a^2 + 2\mathbf{a} \cdot \mathbf{b})^{1/2}} = \frac{1}{b} \left(1 + \frac{a^2}{b^2} + 2\frac{\mathbf{a} \cdot \mathbf{b}}{b^2} \right)^{-1/2} \\ &= \frac{1}{b} \left(1 - \frac{a^2}{2b^2} - \frac{\mathbf{a} \cdot \mathbf{b}}{b^2} + \dots \right) \approx \frac{1}{b} - \frac{\mathbf{a} \cdot \mathbf{b}}{b^3} \end{aligned}$$

$\boxed{a/b \rightarrow 0}$

$$\Rightarrow \frac{1}{|\mathbf{x} - (\mathbf{x}' - \mathbf{n}d)|} \approx \frac{1}{|\mathbf{x} - \mathbf{x}'|} - d\mathbf{n} \cdot \frac{\mathbf{x} - \mathbf{x}'}{|\mathbf{x} - \mathbf{x}'|^3} \quad [\text{valid for } d \ll |\mathbf{x} - \mathbf{x}'|]$$

$$\boxed{\begin{aligned} \mathbf{b} &\rightarrow \mathbf{x} - \mathbf{x}' \\ \mathbf{a} &\rightarrow \mathbf{n}d \end{aligned}}$$

Sub. $\frac{1}{|\mathbf{x} - (\mathbf{x}' - \mathbf{n}d)|} \approx \frac{1}{|\mathbf{x} - \mathbf{x}'|} - d\mathbf{n} \cdot \frac{\mathbf{x} - \mathbf{x}'}{|\mathbf{x} - \mathbf{x}'|^3}$

into $\Phi(\mathbf{x}) = \frac{1}{4\pi\epsilon_0} \int_S \sigma(\mathbf{x}') \left[\frac{1}{|\mathbf{x} - \mathbf{x}'|} - \frac{1}{|\mathbf{x} - (\mathbf{x}' - \mathbf{n}d)|} \right] da'$, we obtain

$$= -\nabla \frac{1}{|\mathbf{x} - \mathbf{x}'|} = \nabla' \frac{1}{|\mathbf{x} - \mathbf{x}'|}$$

$$\Phi(\mathbf{x}) = \frac{1}{4\pi\epsilon_0} \int_S \underbrace{\sigma(\mathbf{x}')d(\mathbf{x}')\mathbf{n}}_{D(\mathbf{x}')} \cdot \frac{\mathbf{x} - \mathbf{x}'}{|\mathbf{x} - \mathbf{x}'|^3} da' = \frac{1}{4\pi\epsilon_0} \int_S D(\mathbf{x}')\mathbf{n} \cdot \nabla' \frac{1}{|\mathbf{x} - \mathbf{x}'|} da' \tag{1.24}$$

σ and d appear as a product here, so it's meaningful to define the product as the dipole layer strength.

or $\Phi(\mathbf{x}) = \frac{1}{4\pi\epsilon_0} \int_S D(\mathbf{x}') \underbrace{\mathbf{n} \cdot \frac{\mathbf{x} - \mathbf{x}'}{|\mathbf{x} - \mathbf{x}'|}}_{-\cos\theta} \underbrace{\frac{1}{|\mathbf{x} - \mathbf{x}'|^2}}_{1/r^2} da' = -\frac{1}{4\pi\epsilon_0} \int_S D(\mathbf{x}') d\Omega \tag{1.26}$


$$\begin{cases} d\Omega \geq 0, & \text{if } \cos\theta > 0 \\ d\Omega < 0, & \text{if } \cos\theta < 0 \end{cases}$$

$$\underbrace{\hspace{10em}}_{-d\Omega}$$

See figure two pages back.

$$\text{Rewrite : } \Phi(\mathbf{x}) = \begin{cases} -\frac{1}{4\pi\epsilon_0} \int_S D(\mathbf{x}') d\Omega & (1.26) \\ \frac{1}{4\pi\epsilon_0} \int_S D(\mathbf{x}') \mathbf{n} \cdot \nabla' \frac{1}{|\mathbf{x} - \mathbf{x}'|} da' & (1.24) \end{cases}$$

Note: (1) The direction of \mathbf{n} and sign of $d\Omega$ are shown below with respect to the polarity of the dipole layer:

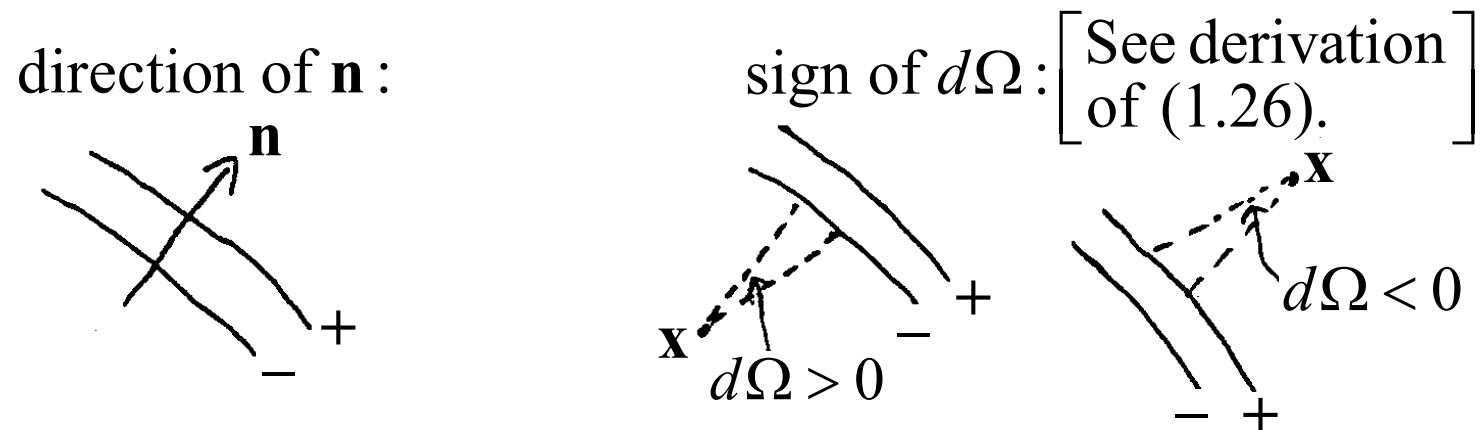


(2) The RHS of (1.24) is an explicit function of \mathbf{x} (the position of observation). The RHS of (1.26) is an implicit function of \mathbf{x} , because the total solid angle depends on \mathbf{x} .

Question: Under what condition will (1.24) and (1.26) be invalid?

Special case 1: A flat-disc shaped double layer with $D = \text{const.}$

$$\Phi = -\frac{1}{4\pi\epsilon_0} \int_S D(\mathbf{x}') d\Omega \quad (1.26)$$

$$\Phi_+ - \Phi_- = \frac{D}{2\epsilon_0} - \left(-\frac{D}{2\epsilon_0}\right) = \frac{D}{\epsilon_0}$$

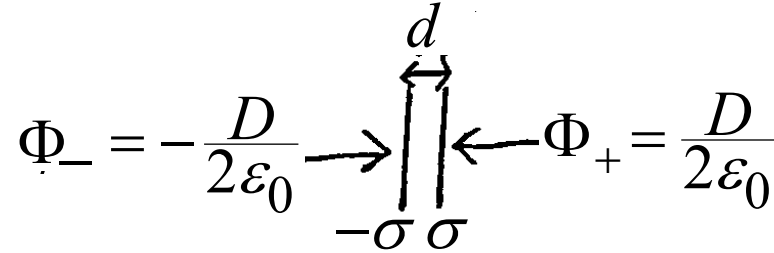


\Rightarrow { electric field between layers: $E_{\perp} = \frac{D}{\epsilon_0 d}$.
 Φ is discontinuous across the dipole layer.

Special case 2: Point dipole

$$\underbrace{\mathbf{p}}_{\text{point dipole}} = \lim_{\Delta a \rightarrow 0} \int_{\Delta a} \underbrace{\mathbf{n} D}_{\text{dipole layer}} da'$$

$$\sigma \Delta a = q$$

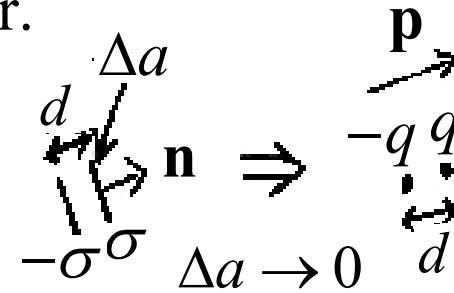

dipole layer point dipole


$$= \lim_{\Delta a \rightarrow 0} \int_{\Delta a} \mathbf{n} (\sigma d) da' = \mathbf{n} \sigma d \Delta a = \mathbf{n} q d$$

$$\Rightarrow \Phi(\mathbf{x}) \stackrel{(1.24)}{=} \frac{1}{4\pi\epsilon_0} \lim_{\Delta a \rightarrow 0} \int_{\Delta a} D(\mathbf{x}') \mathbf{n} \cdot \underbrace{\nabla' \frac{1}{|\mathbf{x}-\mathbf{x}'|}}_{\frac{\mathbf{x}-\mathbf{x}'}{|\mathbf{x}-\mathbf{x}'|^3}} da' = \frac{1}{4\pi\epsilon_0} \frac{\mathbf{p} \cdot (\mathbf{x}-\mathbf{x}')}{|\mathbf{x}-\mathbf{x}'|^3} \quad (1.25)$$



電動力學—Electrodynamics (I) (11410PHYS531000)

電動力學—Electrodynamics (I)

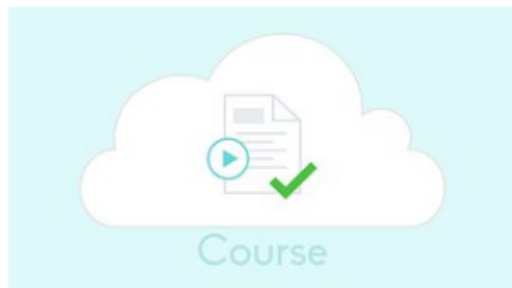

老師: 張存續

身份: 老師 (切换)

私人留言

課程活動

公告

行事曆

課程資訊

電動力學—Electrodynamics (I) / 上課教材

上課教材

新增 複製

項次	標題	發表人	人氣	討論	更新時間	
1	EDchap07 250710	張存續	23	0	22 小時前	
2	EDchap06 250709	張存續	10	0	22 小時前	
3	EDchap05 250709	張存續	14	0	22 小時前	
4	EDchap04 250709	張存續	11	0	22 小時前	
5	EDchap03 250709	張存續	25	0	22 小時前	
6	EDchap02 250710	張存續	18	0	22 小時前	
7	EDchap01 250902a	張存續	35	0	22 小時前	

項次	組別名稱	組長	組員	人數	回應	
1	助教 莊振銓	莊鎮銓	胡漢霖, 呂衍德, 何旻芳, 楊仁皓, 謝博安, 許耀鴻, 古富元, 鄧家偉, 張晏誠, 詹捷宇, 鄭基君, 鄭雅雯, 陳衍, 葉建溥, 喻子勳, 何之田, 陳亭君, 吳應隆, 孫子雯, 林怡萱, 林子承, 何嘉芸, 黃家聲, 許竣硯, 林峻瑋, 顏安生, 賴原民, 石泰銘, 游佳琪, 張凱翔, 林雅苓, 王顥豐, 蔡秉原, 高偉軒, 羅有勝, 楊安琪, 賴唯紳, 林鑫宏, 徐誌鋒, 李文宇	41	0	⋮
2	助教 曾柏瑋	曾柏瑋	張智瑋, 呂森德, 陳佳壕, 劉怡萱, 林柏宇, 趙睿中, 董宗瑋, 林豐哲, 曾偉豪, 高良, 申策任, 駱秉棋, 劉達, 劉權陞, 王維楨, 李宗翰, 沈煒翔, 黃程祥, 胡智騰, 鍾景和, 唐紹評, 林建翔, 黃珽靖, 王秉恩, 方慎謀, 許凱翔, 王志成, 羅泓羽, 吳偉帆, 陳冠霖, 黃子殷, 陳思蓉, 郭奐均, 紀人豪, 蔡馥安, 陳奕睿, 李鈺哲, 柯俊宇, 傅三毅, 楊孟哲, 向榮遠	42	0	⋮
3	助教 劉禹賢	劉禹賢	周鄺宏, 林郁晨, 艾瑞美, 阮醫凰, 唐玉華, 范世孝, 汪若榆, 黃柏瑋, 賴胤全, 吳姿儀, 蕭睿希, 李啟維, 蔡子勻, 陳秉州, 顏廷翰, 賴冠彤, 王子宸, 陳定安, 卿少熏, 吳柏彥, 葉庭, 趙淨, 邱人維, 袁竣揚, 林國俊, 梁偉廷, 劉崇佑, 柳晴若, 金佑築, 徐秉宏, 池晨瑜, 游高竣, 洪浚凱, 羅岳德, 劉名翔, 林庭好, 林柏安, 梁筑庭, 林俊佑, 吳致勇	41	0	⋮